

Contact: Copper alloy

Applicable Wire:0.3~5.0mm²

1


2

3

4

- 1:— Series No.
2:— TF:Female Terminal
3:— Q:Tin Plated
4:— 01:0.3~0.6mm2
02:0.75~1.25mm2
03:1.5~3.0mm2
04:3.0~5.0mm2

H50002TF-PQ-01	0.3~0.6mm ²	16.0	2.45	3.55	2.30	0.45	2.80	0.45
H50002TF-PQ-02	0.75~1.25mm ²	16.0	3.25	4.45	3.00	0.65	3.60	0.65
H50002TF-PQ-03	1.5~3.0mm ²	16.0	4.00	5.50	3.70	0.85	4.60	0.90
H50002TF-PQ-04	3.0~5.0mm ²	18.0	5.40	7.05	3.90	1.10	6.50	1.50
P/N	WIRE RANGE	L	H1	H2	W1	R1	W2	R2

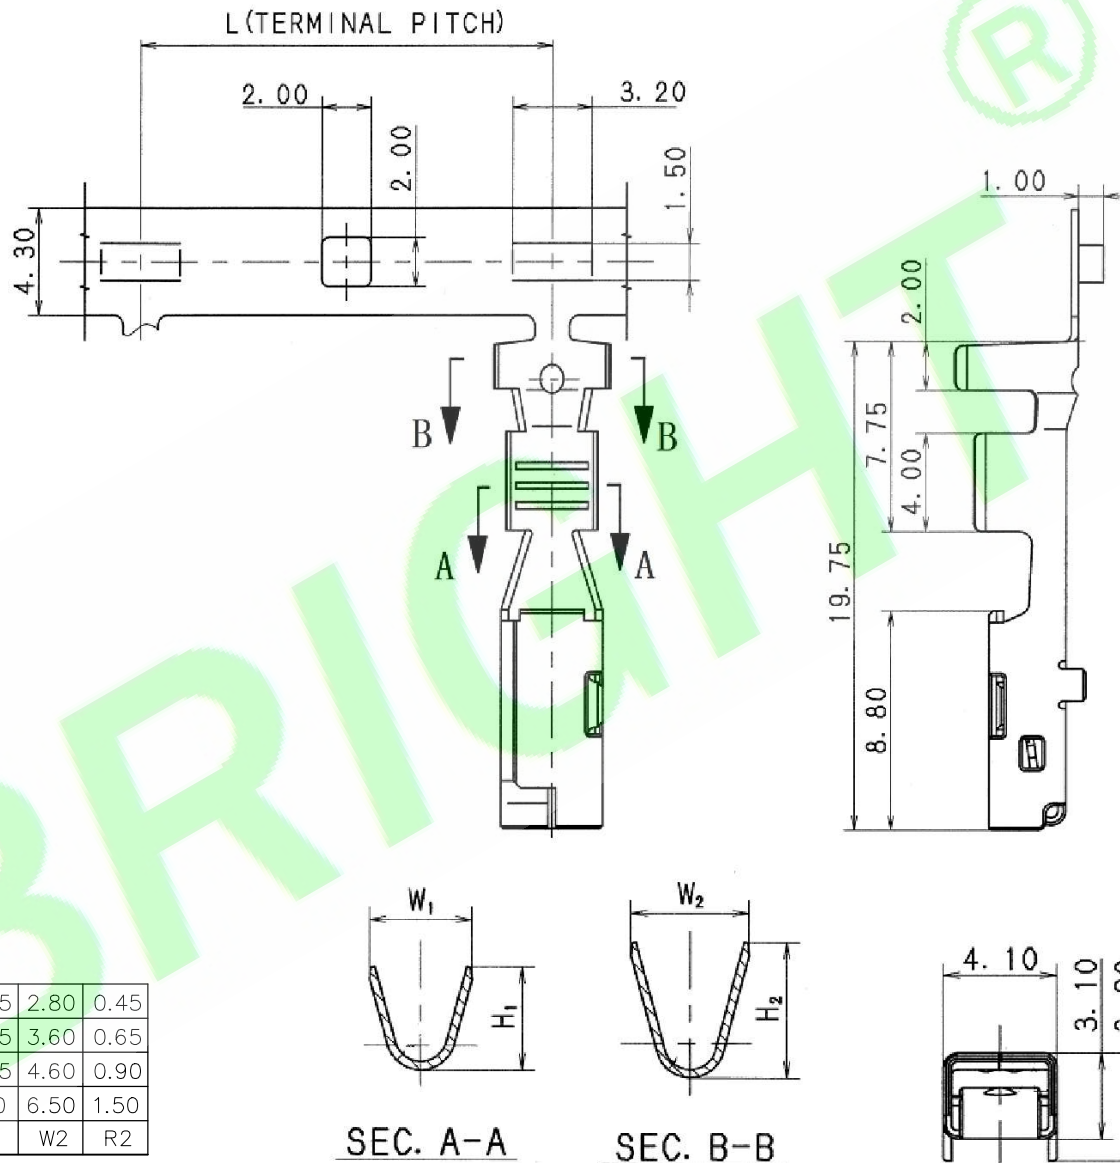

				DR.BY.: Samson		GENERAL TOLERANCE:		PART NO : H50002TF-PQ-XX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
						LINEAR	ANGLES						
				CHKD.: Tony		x.: ±0.40	x': REF±6°	DWG. NO.:		TITLE : Pitch 5.0mm Connector Terminal			
						x.x: ±0.35	x.x': ±3.0°						
1X	ORIGINAL	Judyyan		APPD.:	x.xx: ±0.25	x.xx': ±2.0°			DATE: 27-Aug-2023		SHEET: 1/1		A4
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.15	x.xxx':					SCALE: 1:1		
											UNIT: mm		