







Specifications:
Material And Finish:
Insulator:PBT UL94V-0

Rating:
Current Voltage:36VDC
Operating Temperature Range:-40°C~+120°C

Electrical:
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute

Ordering Information
H508001M-21P-01-XX
1 2 3 4 5

- 1: — Series No.
2: — M:Male Housing
3: — No. of Positions
4: — W:White
5: — A:In Bag
B:In Box

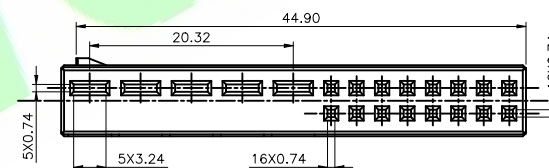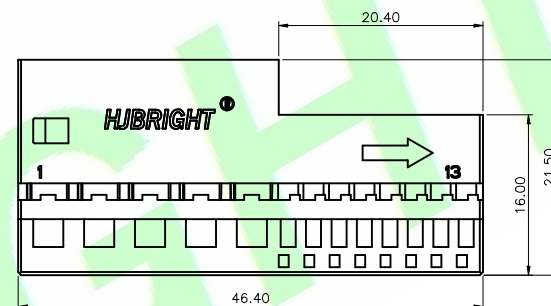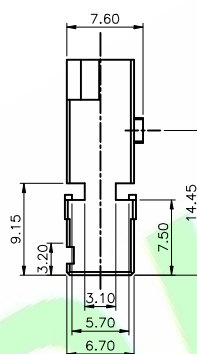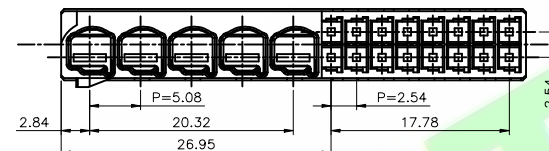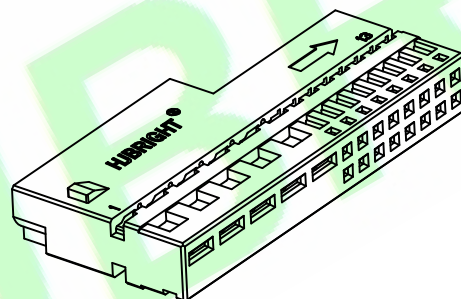


1X	ORIGINAL	Hu.CH	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Hu.CH	GENERAL TOLERANCE:		PART NO : H508001M-21P-01-XX
	LINEAR	ANGLES	
CHKD.: Sam	X.:	X°: ±5.0°	DWG. NO.:
	X.X: ±0.30	X.X°: ±3.0°	
APPD.: Billy	X.XX: ±0.20	X.XX°: ±2.0°	TITLE : 5.08+2.54mm Pitch HOUSING
	X.XXX: ±0.10	X.XXX°: ±1.0°	
			DATE: 03-Aug-2024

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4