







Specifications:  
Material And Finish:  
Insulator:PBT UL94V-0

Rating:  
Current Voltage:36VDC  
Operating Temperature Range:-40°C~+120°C

Electrical:  
Insulator resistance:1000M ohm min.  
Withstanding Voltage:1000V AC/Minute

Ordering Information  
H508001M-21P-02-XX  
1 2 3 4 5

- 1: — Series No.  
2: — M:Male Housing  
3: — No. of Positions  
4: — B:Black  
5: — A:In Bag  
B:In Box

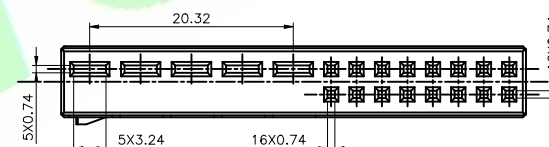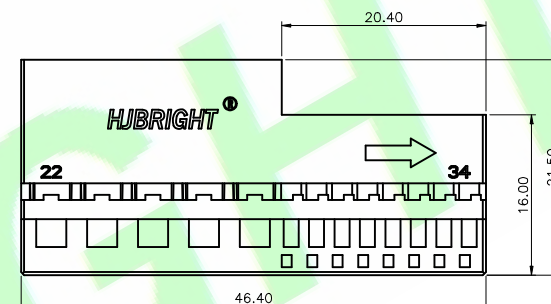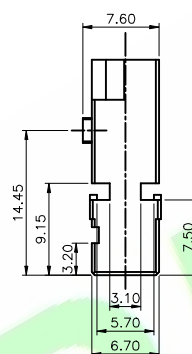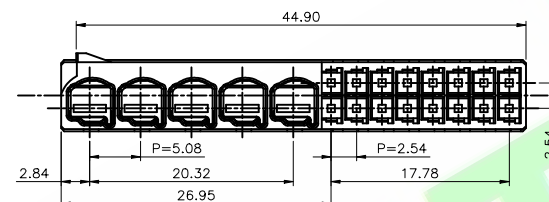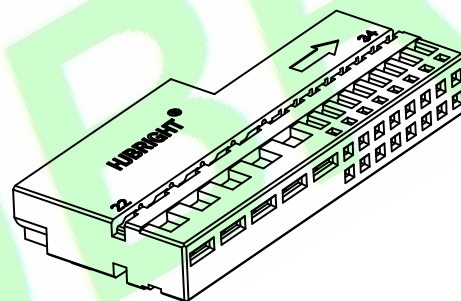

|      |             |       |          |
|------|-------------|-------|----------|
| 1X   | ORIGINAL    | Hu.CH |          |
| REV. | DESCRIPTION | DR.BY | ECN. NO. |

|                  |                    |                 |                                                           |
|------------------|--------------------|-----------------|-----------------------------------------------------------|
| DR.BY.:<br>Hu.CH | GENERAL TOLERANCE: |                 | PART NO : H508001M-21P-02-XX                              |
|                  | LINEAR             | ANGLES          |                                                           |
| CHKD.:<br>Sam    | x.:                | x':   ±5.0°     | DWG. NO.:<br><br>TITLE :<br><br>5.08+2.54mm Pitch HOUSING |
|                  | x.x:   ±0.30       | x.x':   ±3.0°   |                                                           |
| APPD.:<br>Billy  | x.xx:   ±0.20      | x.xx':   ±2.0°  | DATE: 03-Aug-2024                                         |
|                  | x.xxx:   ±0.10     | x.xxx':   ±1.0° |                                                           |

|                       |  |                                        |  |
|-----------------------|--|----------------------------------------|--|
| HJBRIGHT® 东莞市華晶電子有限公司 |  | BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED |  |
| SHEET: 1/1            |  | A4                                     |  |
| SCALE: 1:1            |  |                                        |  |
| UNIT: mm              |  |                                        |  |