

RoHS Compliant






Specifications:
Material And Finish:
Insulator:PBT UL94V-0

Rating:
Current Voltage:36VDC
Operating Temperature Range:-40°C~+120°C

Electrical:
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute

Ordering Information
H508001M-42P-01-XX
1 2 3 4 5

- 1: — Series No.
2: — M:Male Housing
3: — No. of Positions
4: — B:Black
5: — A:In Bag
B:In Tube

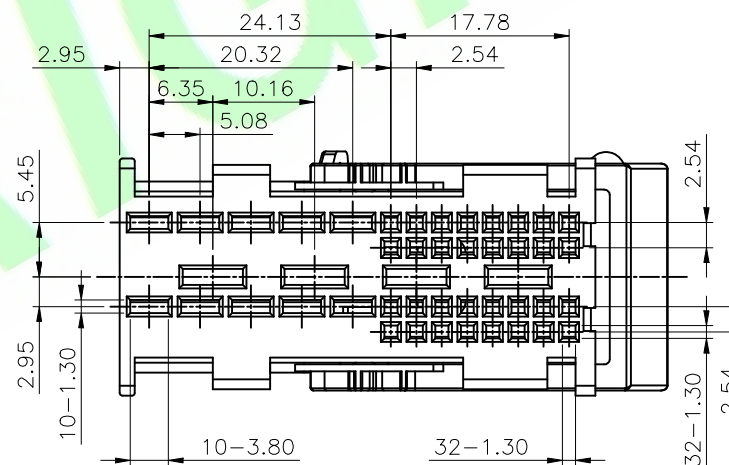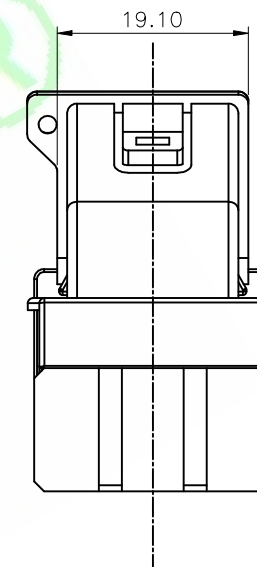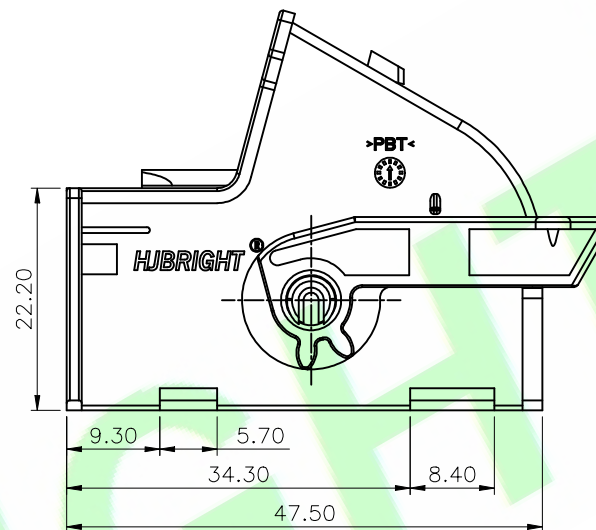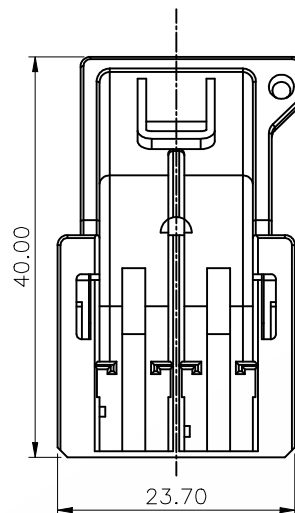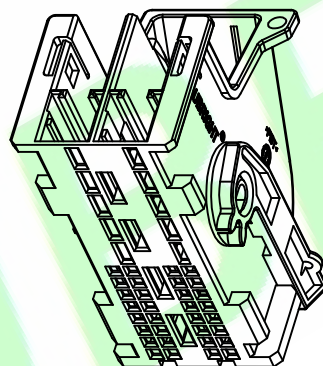

				DR.BY.: Hu.CH		GENERAL TOLERANCE:		PART NO : H508001M-42P-01-XX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED					
				CHKD.: Sam		LINEAR	ANGLES	DWG. NO.:							
						APPD.: Billy		x.: ±5.0°	TITLE :						
						x.x: ±0.30	x.x°: ±3.0°	5.08+2.54mm Pitch SHELL OF WIRE							
						x.xx: ±0.20	x.xx°: ±2.0°	DATE: 02-Aug-2024							
1X		ORIGINAL		Hu.CH						SHEET: 1/1				A4	
REV.		DESCRIPTION		DR.BY.		ECN. NO.				SCALE: 1:1					
										UNIT: mm					