

Specifications:
Material And Finish:
Contact: Phosphor Bronze
Plated: See Ordering Information

Rating:
Current Rating: 15 Amp AC DC Max
Voltage Rating: 250V AC/DC
Operating Temperature Range: $-25^{\circ}\sim +85^{\circ}\text{C}$

Electrical:
Contact resistance: 10m Ohm Max
Insulator resistance: 1000M ohm min.
Withstanding Voltage: 1500V AC/Minute


Applicable Wire Sizes: AWG#16-14

Ordering Information

H508010TF-PX-01

1 2 3 4

- 1: — Series No.
2: — TF: Female Terminal
3: — A: Gold Flash
S: Matte Tin Plated.
Q: Tin Plated
4: — 01: Apply 14-16AWG

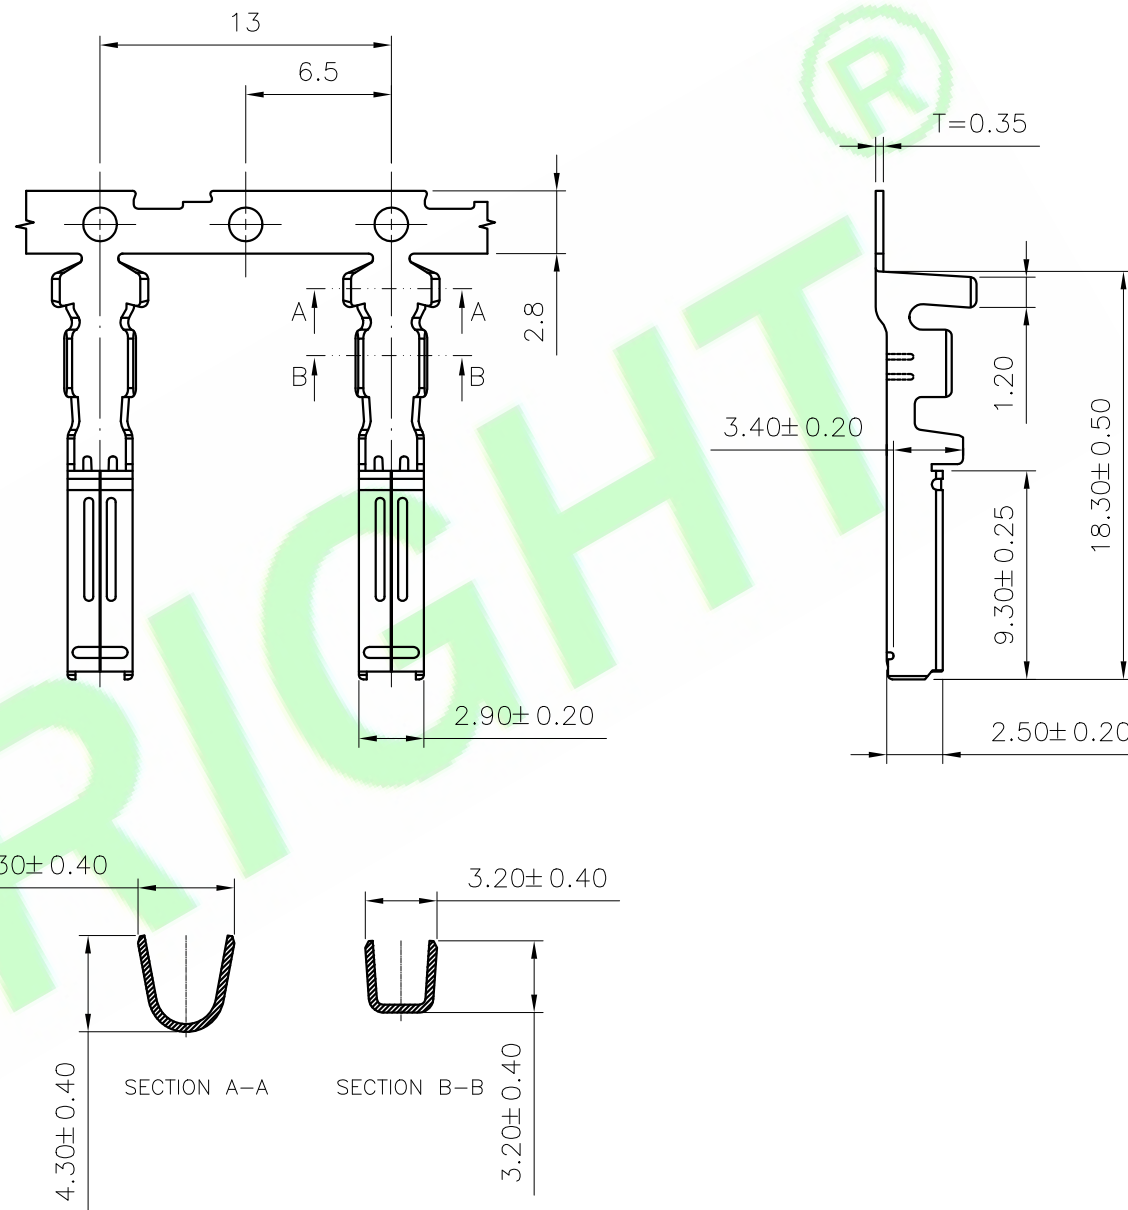

DR.BY.: JoinZm	GENERAL TOLERANCE:		PART NO : H508010TF-PX-01	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Judyyan	x.: ± 0.30	x': $\pm 5.0^{\circ}$	TITLE :	
	x.x: ± 0.20	x.x': $\pm 3.0^{\circ}$	5.08mm Pitch Female Terminal	
APPD.: Billy	x.xx: ± 0.15	x.xx': $\pm 2.0^{\circ}$	DATE: 24-Jul-2023	
	x.xxx: ± 0.10	x.xxx': $\pm 1.0^{\circ}$		

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	JoinZm	
REV.	DESCRIPTION	DR.BY	ECN. NO