

Specifications:
Material And Finish:
Contact: Copper alloy
Plated: See Ordering Information

Rating:
Current Rating: 15 Amp
Voltage Rating: 250V AC/DC
Operating Temperature
Range: -40°~+105°C


Electrical:
Contact resistance: 20m Ohm Max

Ordering Information

H50801TF-PX-XX

1 2 3 4

- 1: — Series No.
2: — TF: Female Terminal
3: — Plated:
Q: Tin Plated
M: 15u" Gold on contact; Tin on tail
A2: 30u" Gold on contact; Tin on tail
4: — 01: Apply 14-16AWG
02: Apply 16-20AWG
03: Apply 20-24AWG

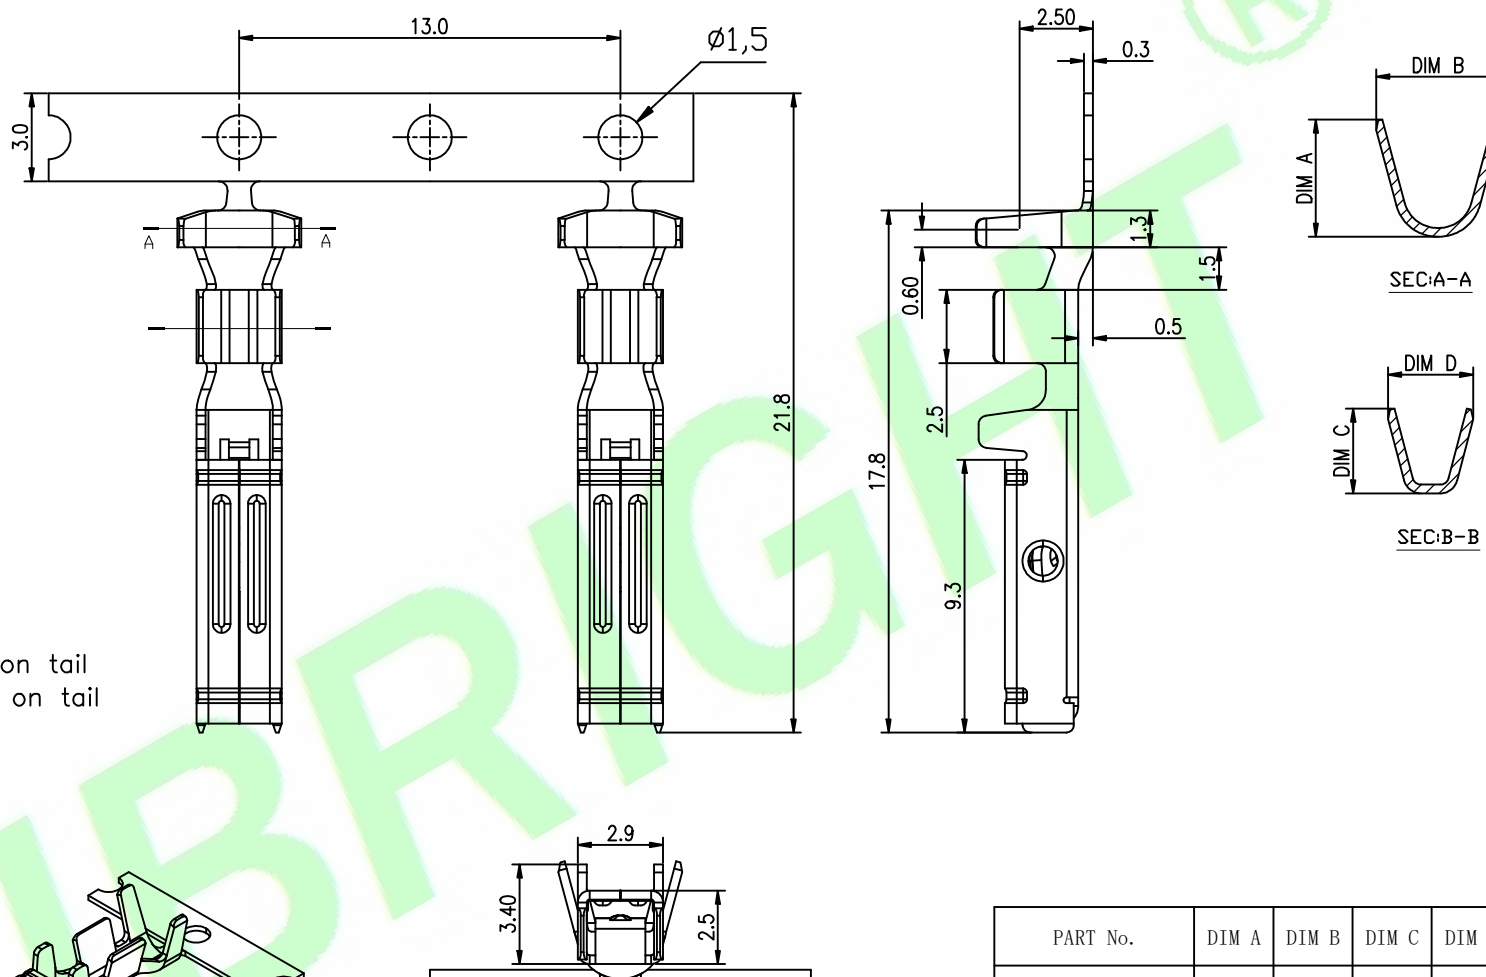


PART No.	DIM A	DIM B	DIM C	DIM D	AWG#
H50801TF-PX-01	3.9	4.8	3.09	3.2	14-16
H50801TF-PX-02	4.0	4.2	2.9	2.9	16-20
H50801TF-PX-03	3.7	3.6	2.1	2.3	20-24

2X	Update the rated current	Judyyan	20241011
1X	ORIGINAL	Hu.CH	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Hu.CH	GENERAL TOLERANCE:		PART NO : H50801TF-PX-XX	
CHKD.: Sam	LINEAR	ANGLES	DWG. NO.:	
	x.: ±0.40	x.x: ±5.0°	TITLE :	
	x.x: ±0.25	x.x: ±3.0°	5.08mm Pitch Female Terminal	
	x.xxx: ±0.15	x.xxx: ±2.0°	DATE: 26-Oct-2023	
APPD.: Billy				

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4