

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0

Color: Natural or Black

Rating:

Current Rating:7.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-25~+85°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1500V AC/Minute

Ordering Information

H5081M-XXP-01-XA

1 2 34





1: — Series No.

2: — No. of Positions

3: — N:Natural

B:Black

4: — A:In bag

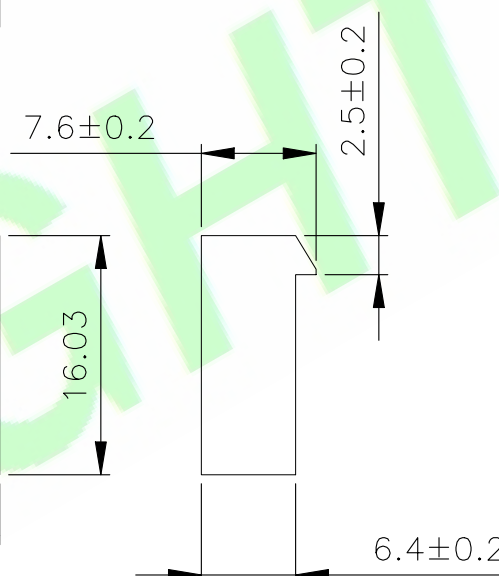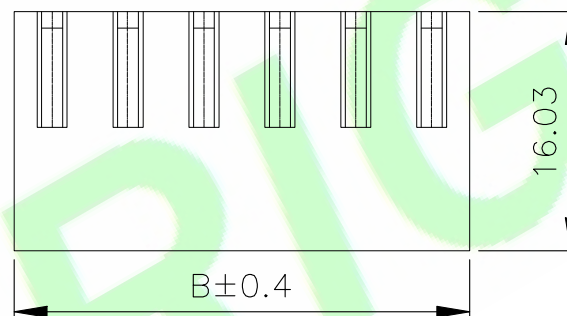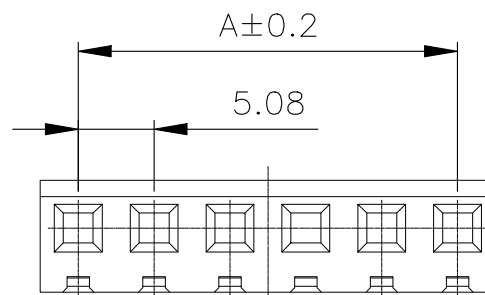

Circuits	Dimensions	
	A	B
02	5.08	10.16
03	10.16	15.24
04	15.24	20.32
05	20.32	25.40
06	25.40	30.48
07	30.48	35.56
08	35.56	40.64
09	40.64	45.72
10	45.72	50.80
11	50.80	55.88
12	55.88	60.96

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H5081M-XXP-01-XA	DWG. NO.:	HJBRIGHT® 东莞市華晶電子有限公司
	LINEAR	ANGLES			
CHKD.: Tony	X:	X': ±5.0°	TITLE : 5.08mm Pitch Housing	DATE: 29-Jun-2022	SHEET: 1/1
	X.X: ±0.30	X.X': ±3.0°			
APPD.: Billy	X.XX: ±0.20	X.XX': ±2.0°	UNIT: mm	THIRD ANGLE PROJECTION	A4
	X.XXX: ±0.15	X.XXX': ±1.0°			

1X	ORIGINAL	Judyyan	ECN. NO.
REV.	DESCRIPTION	DR.BY.	