

Specifications:

Material And Finish:

Insulator:PA66 GF15 Color:Black

Contact:Copper alloy

Plated:Gold plated

Rating:

Operating Temperature Range:-55~+125°C

Electrical:

Peak Reverse Voltage:600V Max

Peak Forward Voltage:1.28V Max

Average Forward Current:4.0A Max

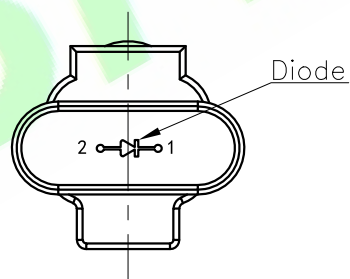
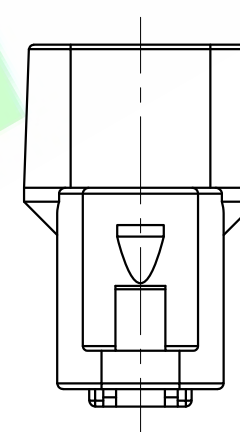
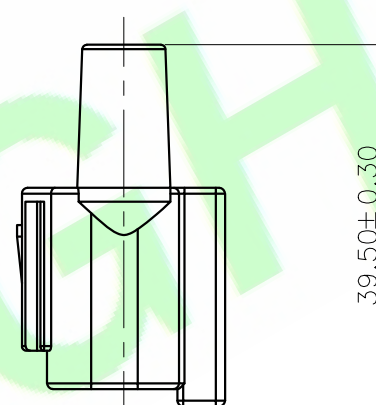
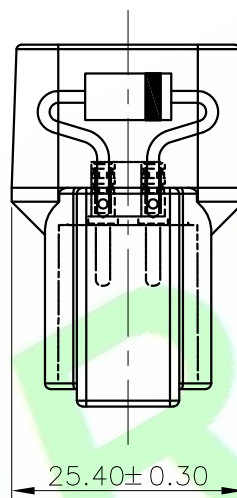
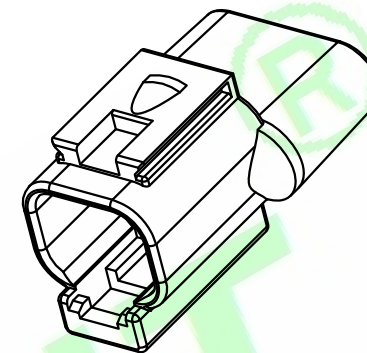
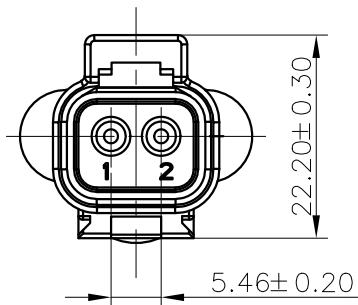
DIODE MOTOROLA P/N MUR460G

Ordering Information

H54601F-02P-01-A

1 2 3 4

- 1:— Series No.
2:— F:Female Housing
3:— No. of Positions
4:— A:In Bag
C:In Tray

DR.BY.:
JoinZm

GENERAL TOLERANCE:

LINEAR

ANGLES

PART NO : H54601F-02P-01-A

CHKD.:
Judyyan

x.: ±0.30

x': ±5.0°

x.x: ±0.20

x.x': ±3.0°

APPD.:
Billy

x.xx: ±0.15

x.xx': ±2.0°

x.xxx: ±0.10

x.xxx': ±1.0°

DWG. NO.:

TITLE :

5.46mm Pitch Female Housing

DATE: 11-Nov-2023

HJBRIGHT®


東莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	JoinZm	ECN. NO
REV.	DESCRIPTION	DR.BY	