
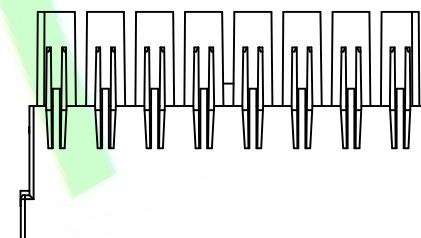

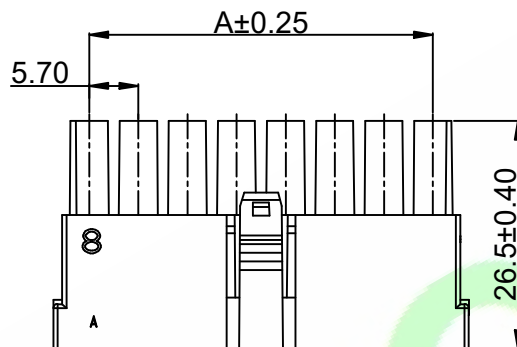


Specifications:
Material And Finish:
Insulator:Nylon 66 UL94V-0;Color:Black

Rating:
Current Rating:23A AC/DC(12AWG/ per pin)
Voltage Rating:600V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:10m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:2200V AC/Minute



Ordering Information

H5701-XXP-A

1 2 3

- 1: — Series No.
2: — No. of Positions
3: — A:In bag

Part No.	Dimension mm	
	A	B
02P	5.70	12.05
03P	11.40	17.75
04P	17.10	23.45
05P	22.80	29.15
06P	28.50	34.85
07P	34.20	40.55
08P	39.90	46.25

5X				DR.BY.: Ken	GENERAL TOLERANCE:		PART NO : H5701-XXX-A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	x.: ±0.50	x': ±5.0°	TITLE : 5.7mm Crimping Male Housing Single ROW		SHEET: 1/1			A4
2X	Update code options	Judyyan	20220728	Mark	x.x: ±0.40	x.x': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Ken		APPD.:	x.xx: ±0.25	x.xx': ±2.0°	DATE: 16-Jun-2019		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.15	x.xxx': ±1.0°						