

Specifications:
Material And Finish:
Insulator:PA66 UL94V-0
Color:Black





Rating:
Current Rating:14 Amp
Voltage Rating:24V AC/DC
Operating Temperature Range:-40°~+125°C

Waterproofing grade:IP67/IPX6K/IPX9K

Ordering Information

H6001F-XXP-01-A
1 2 3 4

- 1: Series No.
2: F:Female Housing
3: No. of Positions
4: A:In Bag

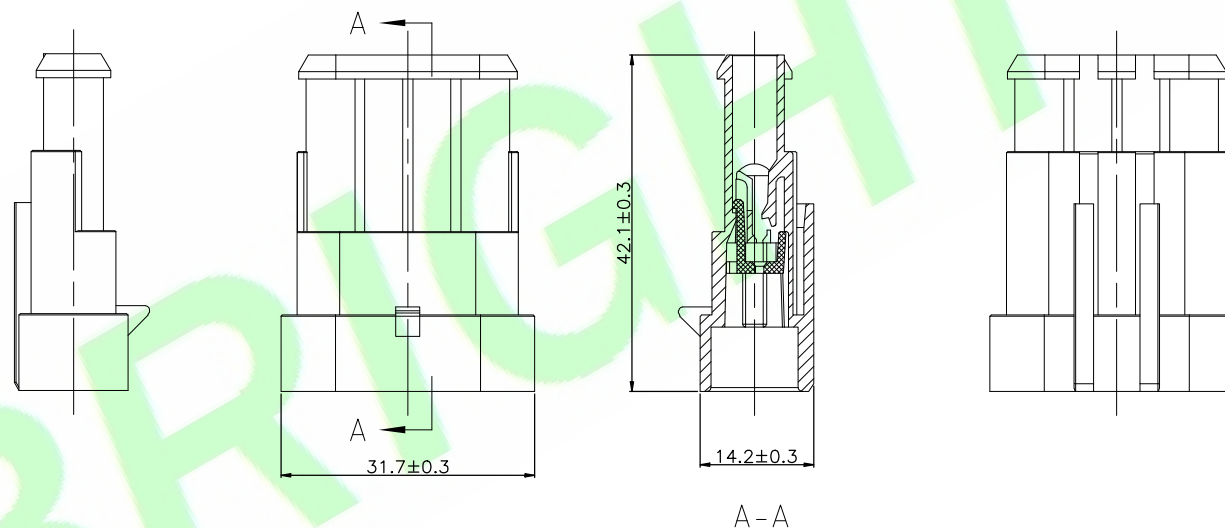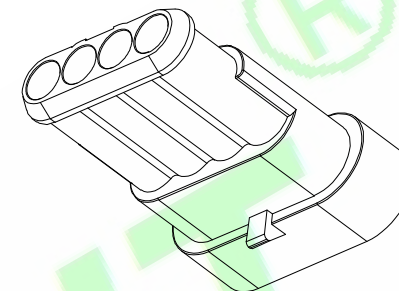


4PIN

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H6001F-XXP-01-A
	LINEAR	ANGLES	
CHKD.: Hu.ch	X.: ±	X': ±5.0°	DWG. NO.:
	X.X: ±0.30	X.X': ±3.0°	
APPD.: Billy	X.XX: ±0.20	X.XX': ±2.0°	TITLE : 6.0mm Pitch Sealed Female Housing
	X.XXX: ±0.10	X.XXX': ±1.0°	
			DATE: 10-Sep-2023




HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/2
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

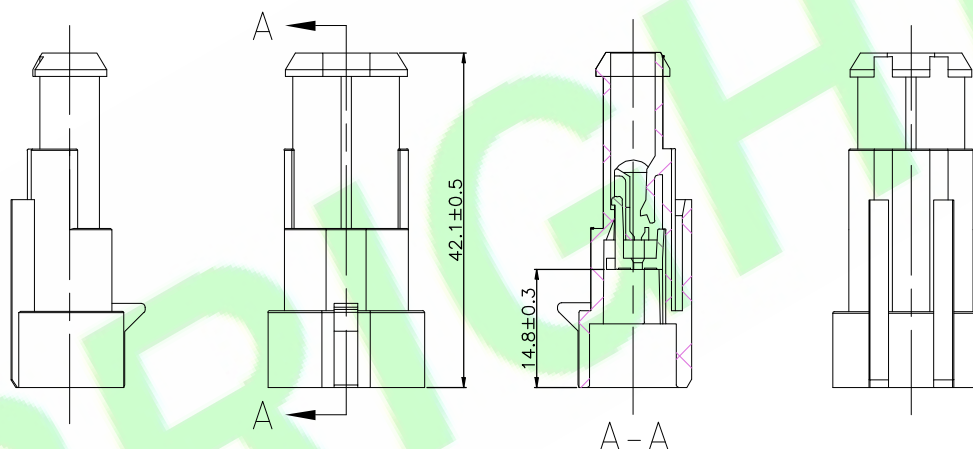

2PIN

				DR.BY.: Judyyan		GENERAL TOLERANCE:		PART NO : H6001F-XXP-01-A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 2/2 SCALE: 1:1 UNIT: mm  A4					
				CHKD.: Hu.ch		LINEAR	ANGLES	DWG. NO.:							
						X: ±	X: ±5.0°	TITLE : 6.0mm Pitch Sealed Female Housing							
						X.X: ±0.30	X.X: ±3.0°								
1X	ORIGINAL	Judyyan	APPD.: Billy	X.XX: ±0.20	X.XX: ±2.0°	DATE: 10-Sep-2023									
REV.	DESCRIPTION	DR.BY		ECN. NO.	X.XXX: ±0.10			X.XXX: ±1.0°							
1		2		3		4		5		6		7		8	