

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Natural

Rating:

Current Rating:20 Amp AC/DC (2circuits/AWG#12)

Voltage Rating:600V AC/DC

Temperature Range:-40~+105°C




Electrical:

Contact resistance:

Initial value:10m Ohm Max.

Insulator resistance:1000M ohm min.

Withstanding Voltage:2000V AC/Minute

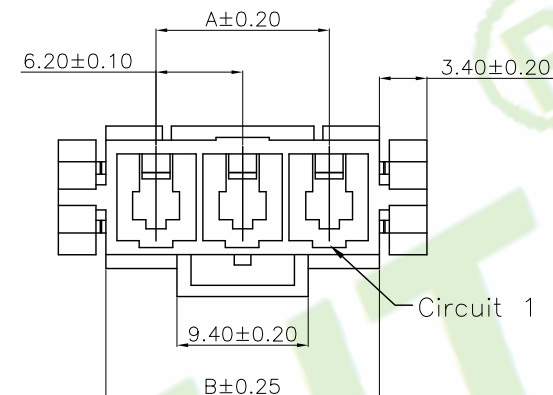

Ordering Information

H6201F-XXP-A

1 2 3 4


1:— Series No.

2:— M:Male


3:— No.of Positions

4:— A:In Bag



Poles	Dimensions (mm)	
	A	B
01P	/	7.20
02P	6.20	13.40
03P	12.40	19.60
04P	18.60	25.80

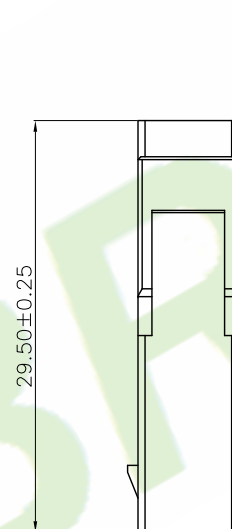

1P

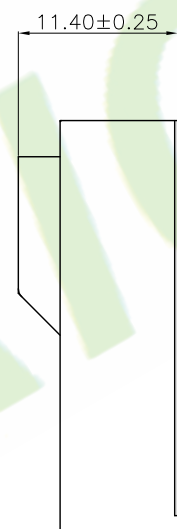

2P~4P

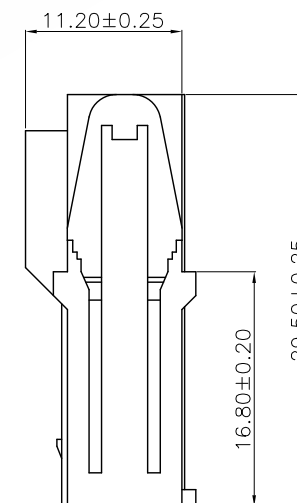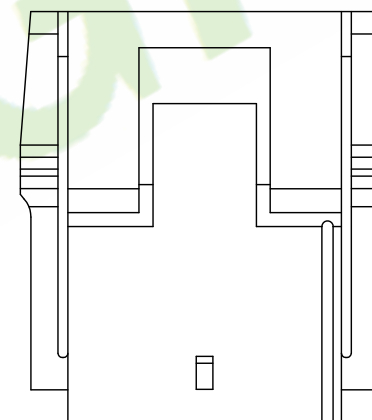


5X				DR.BY.:	
4X				Judyyan	
3X				CHKD.:	
2X				Mark	
1X	ORIGINAL	Judyyan		APPD.:	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.25	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.20	X.XX': ±2.0°
X.XXX: ±0.15	X.XXX': ±1.0°

PART NO : H6201F-XXP-A
DWG. NO.:
TITLE : 6.20mm PITCH Male Housing
DATE: 20-Sep-2021

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4