

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Natural

Rating:

Current Rating:20 Amp AC/DC (2circuits/AWG#12)

Voltage Rating:600V AC/DC

Temperature Range:-40°~+105°C


Electrical:

Contact resistance:

Initial value:10m Ohm Max.

Insulator resistance:1000M ohm min.

Withstanding Voltage:2000V AC/Minute

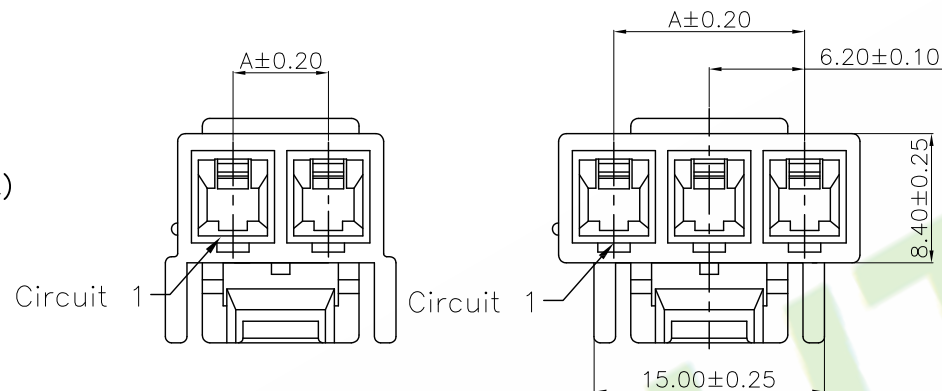

Ordering Information

H6201M-XXP-A

1 2 3 4


1:— Series No.

2:— M:Male


3:— No.of Positions

4:— A:In Bag


Poles	Dimensions (mm)	
	A	B
02P	6.20	15.00
03P	12.40	19.60
04P	18.60	25.80

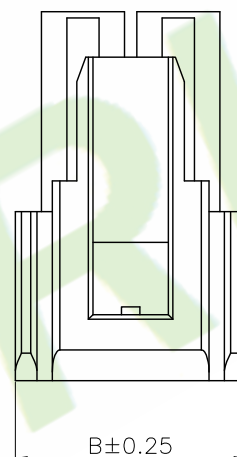

2P

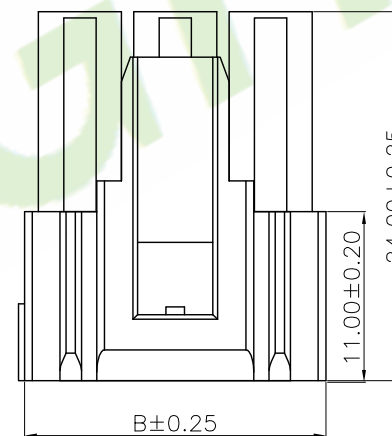

3P~4P

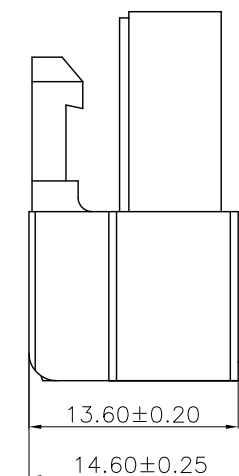

5X				DR.BY.:	Judyyan	GENERAL TOLERANCE:		PART NO : H6201M-XXP-A		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X						LINEAR	ANGLES		DWG. NO.:				
3X				CHKD.:	Mark	x.:	x': ±5.0°		TITLE : 6.20mm PITCH Male Housing		SHEET: 1/1		A4
2X						x.x: ±0.25	x.x': ±3.0°				SCALE: 1:1		
1X	ORIGINAL	Judyyan		APPD.:	x.xx: ±0.20	x.xx': ±2.0°		DATE: 20-Sep-2021		UNIT: mm	THIRD ANGLE PROJECTION		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.15	x.xxx': ±1.0°							