

RoHS Compliant

Specifications:

Material: Phosphoric Bronze

Applicable wire sizes: AWG12#~22

Insulation O.D.: 4.10mm Max

Rating:

Current Rating: 20Amp AC/DC (2circuits/AWG#12)



Electrical:

Contact resistance:

Initial value: 10m Ohm Max.

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 2000V AC/Minute

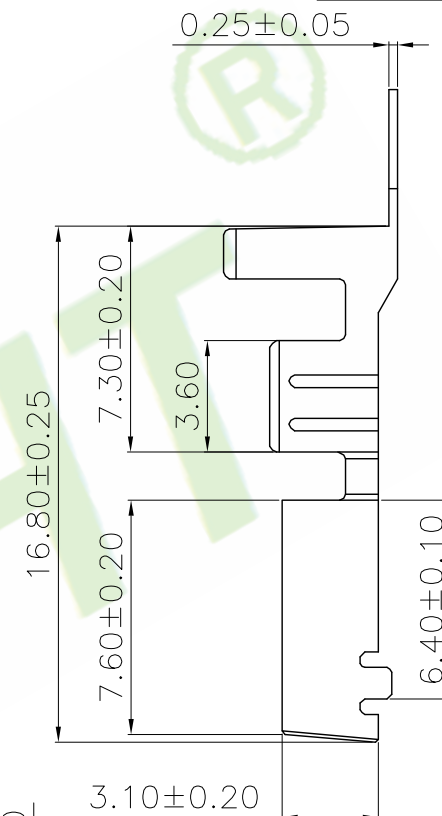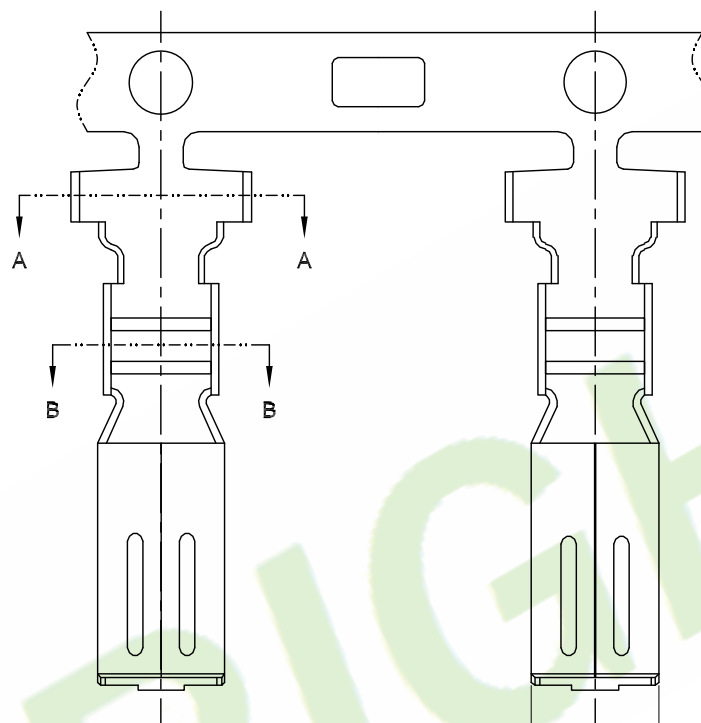

Ordering Information

H6201TF-PX

1 2 3

- 1: — Series No.
2: — TF: Female Terminal
3: — A: Gold flash
Q: Plated Tin


6.00±0.40

SEC:A-A

4.00±0.40

SEC:B-B

4.50±0.40

5X				DR.BY.:	Judyyan	GENERAL TOLERANCE:	PART NO : H6201TF-PX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				CHKD.:	Mark	LINEAR	DWG. NO.:		
3X				APPD.:	Billy	ANGLES	TITLE :	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X						X.: ±5.0°	6.20mm PITCH CRIMP FEMALE TERMINAL	SCALE: 1:1	
1X	ORIGINAL	Judyyan				X.X: ±0.25	DATE: 20-Sep-2021	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.			X.XX: ±0.20			A4
						X.XXX: ±0.15			