

Specifications:

Material: Phosphoric Bronze

Applicable wire sizes: AWG14~22#

Insulation O.D.: 4.10mm Max

Rating:

Current Rating: 20 Amp AC/DC (2 circuits/AWG#12)


Voltage Rating: 600V AC/DC

Temperature Range: -40°~+105°C

Electrical:

Contact resistance:

Initial value: 10m Ohm Max.

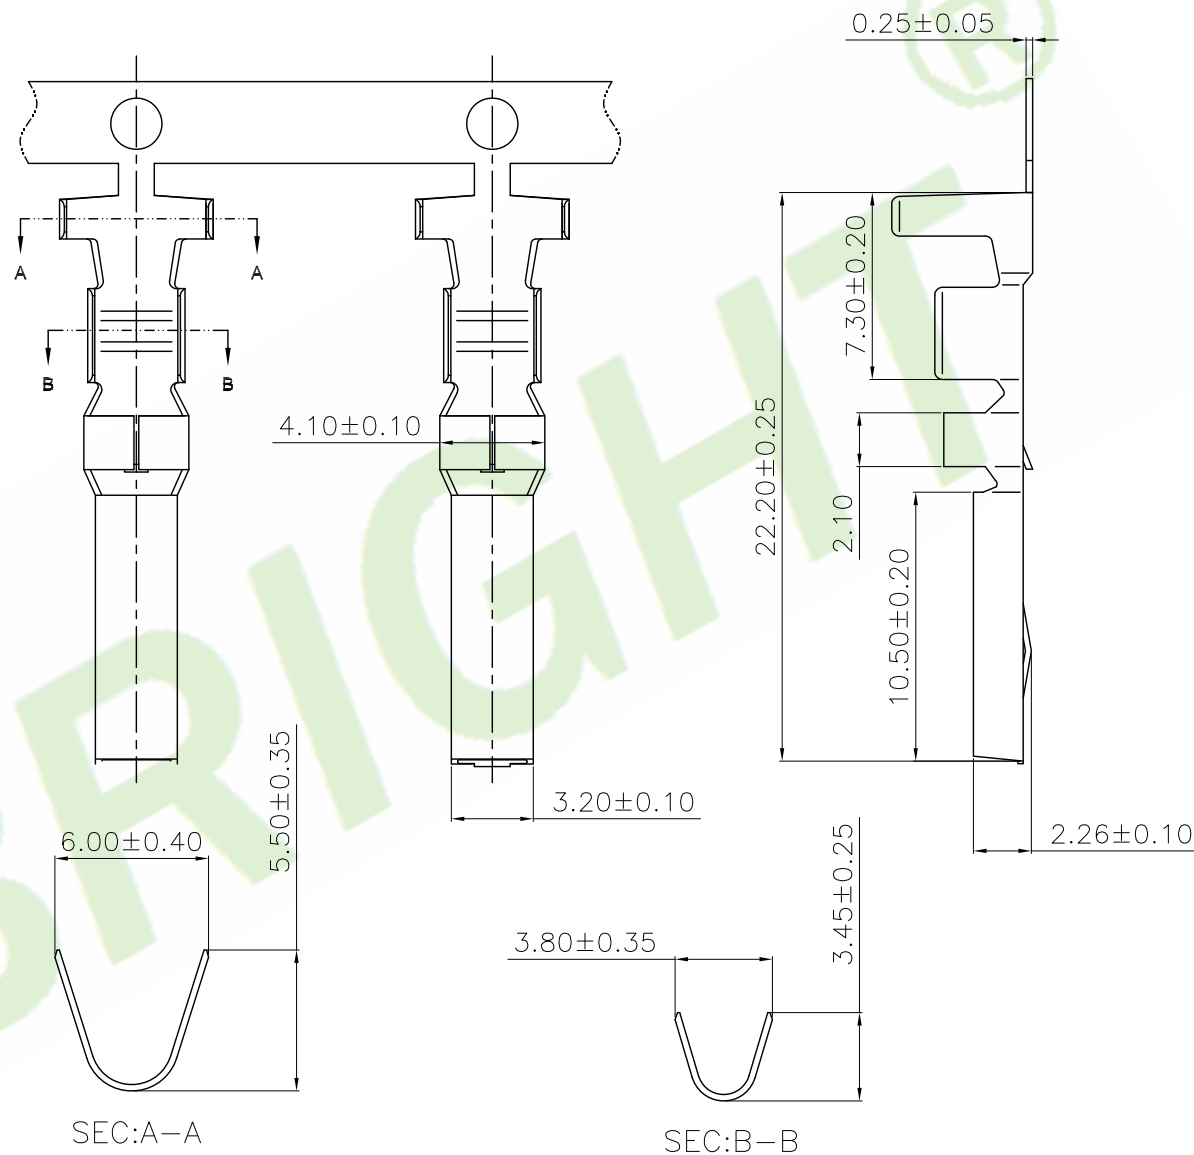

Ordering Information

H6201TM-PX

- 1: Series No.
2: TM: Male Terminal
3: A: Gold flash
Q: Plated Tin

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H6201TM-PX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Judyyan	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	x.:	x': ±5.0°	TITLE : 6.20mm PITCH CRIMP MALE TERMINAL		SHEET: 1/1		A4
2X				Mark	x.x: ±0.25	x.x': ±3.0°			SCALE: 1:1		
1X	ORIGINAL	Judyyan		APPD.:	x.xx: ±0.20	x.xx': ±2.0°	DATE: 20-Sep-2021		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.15	x.xxx': ±1.0°					