

Specifications:

Material And Finish:

Insulator: Nylon66 UL94V-0 Color: Natural

Plated: See Ordering Information

Rating:

Current Rating: 13.5Amp (12AWG)

Voltage Rating: 600V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Electrical:

Contact resistance: 3.5m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 2900V AC/Minute

Ordering Information

H6351M-XXP-XA

1 2 3 4 5

1: — Series No.





2: — M: Male

3: — No. of Positions

4: — W: White

B: Black

5: — A: In Bag

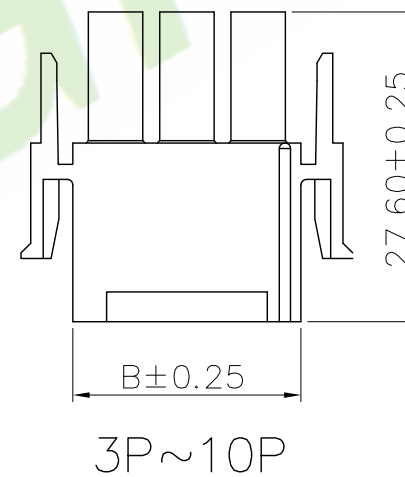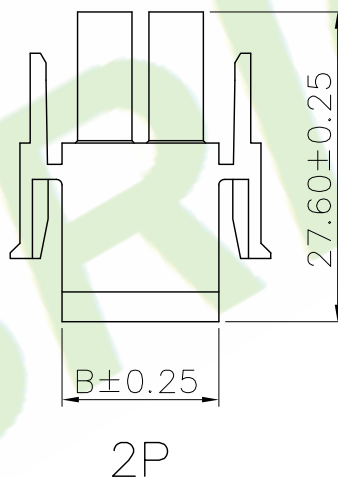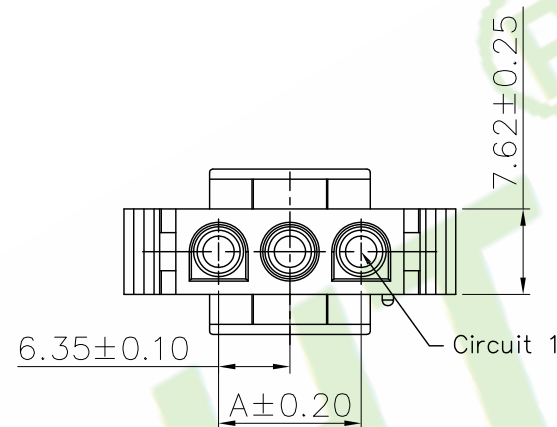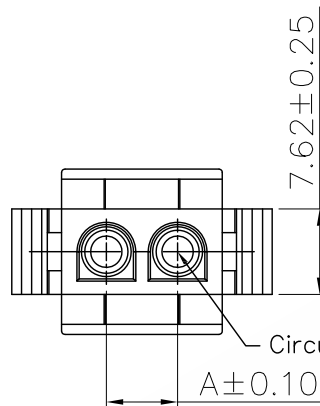

Poles	Dimensions (mm)	
	A	B
2P	6.35	13.97
3P	12.70	20.32
4P	19.05	26.67
5P	25.40	33.02
6P	31.75	39.37
7P	38.10	45.72
8P	44.45	52.07
9P	50.80	58.42
10P	57.15	64.77

5X			
4X			
3X			
2X	Update option code	Judyyan	20221028
1X	ORIGINAL	Jack	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY:	Jack
CHKD.:	Kenry
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ± 0.30	X': $\pm 5.0^{\circ}$
X.X: ± 0.20	X.X': $\pm 3.0^{\circ}$
X.XX: ± 0.15	X.XX': $\pm 2.0^{\circ}$
X.XXX: ± 0.10	X.XXX': $\pm 1.0^{\circ}$

PART NO.:	H6351M-XXP-XA
DWG. NO.:	
TITLE:	6.35mm Pitch Male Housing
DATE:	22-Jul-2014

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET:	1/1
SCALE:	1:1
UNIT:	mm



THIRD ANGLE PROJECTION

A4