

Specifications:
 Material And Finish:
 Insulator:Nylon 66 UL94V-0
 Color:Black/Natural

Rating:
 Current Rating:10A or 18A or 32A AC/DC.
 Voltage Rating:600V AC/DC
 Operating Temperature Range:-40~+105°C

Electrical:
 Contact resistance:5m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:5000V AC/Minute



Ordering Information

H7501M-XXP-01-XX
 1 2 3 4 5

- 1: Series No.
- 2: M:Male Housing
- 3: No. of Positions
- 4: B:Black
N:Natural
- 5: A:In bag
B:In Tube
C:In Tray

Dimensional Information (mm)

| Circuits | A | B | C |
|----------|-------|-------|-------|
| 02 | 15.70 | 7.50 | 12.00 |
| 03 | 23.20 | 15.00 | 12.60 |
| 04 | 30.70 | 22.50 | 19.30 |
| 05 | 38.20 | 30.00 | 19.30 |
| 06 | 45.70 | 37.50 | 19.30 |
| 07 | 53.20 | 45.00 | 19.30 |
| 08 | 60.70 | 52.50 | 19.30 |

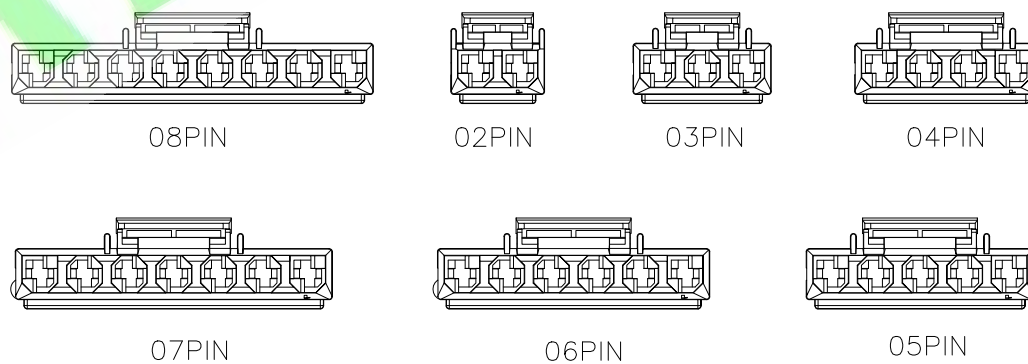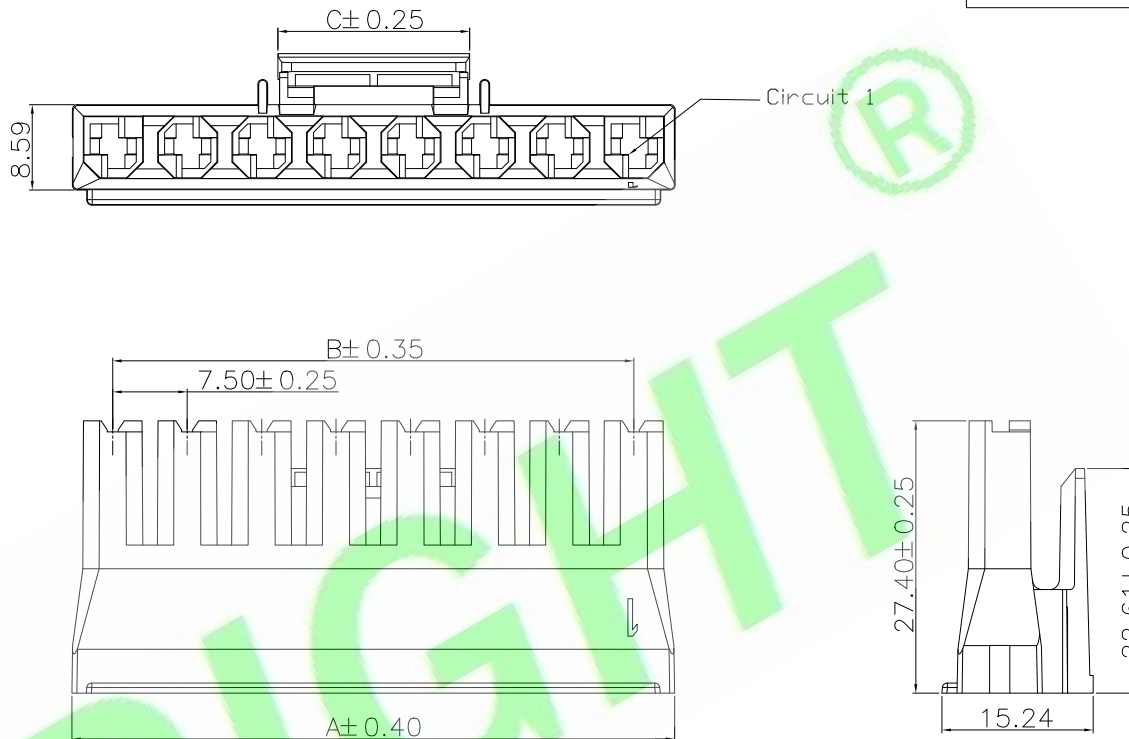

| | | | |
|-------------------|--------------------|---------------|--------------------------------|
| DR.BY.: XIAO | GENERAL TOLERANCE: | | PART NO : H7501M-XXP-01-XX |
| CHKD.: Judyyan | LINEAR | ANGLES | DWG. NO.: |
| | x.: ±0.30 | x': ±5.0° | TITLE : |
| APPD.: Billy | x.x: ±0.40 | x.x': ±3.0° | 7.50mm Pitch Housing connector |
| | x.xx: ±0.25 | x.xx': ±2.0° | DATE: 17-Dec-2024 |
| | x.xxx: ±0.15 | x.xxx': ±1.0° | |

HJBRIGHT® 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4

| | | | |
|----|-------------|-------|----------|
| 1X | ORIGINAL | XIAO | |
| | DESCRIPTION | DR.BY | ECN. NO. |