




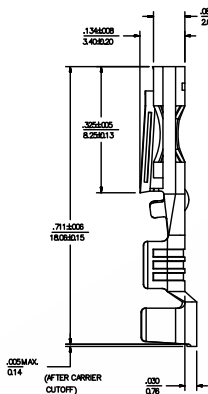






Specifications:
Material And Finish:
Material:Brass
Rating:
Current Rating:18Amp AC,DC
Voltage Rating:600V AC,DC



Ordering Information

- H7501TF-PX-01
1 2 3 4
1:—Series No.
2:—T:Female Terminal
3:—Q:Tin Plated
4:—01:14~16AWG
02:18~20AWG



01:14~16AWG

02:18~20AWG

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : H7501TF-PX-01	
4X				Samson	LINEAR	ANGLES	DWG. NO.:	
3X				CHKD.:	X.: ±0.30	X': ±5.0°	TITLE :	
2X				Tony	X.X: ±0.20	X.X': ±3.0°	7.49mm PitchSabre Crimp Terminal, Female	
1X	ORIGINAL	Samson		APPD.:	X.XX: ±0.15	X.XX': ±2.0°	DATE: 26-Jun-2023	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°		

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION

A4