


Specifications:
 Wire Range:AWG#10~24
 Contact:Phosphor Bronze/High conductivity copper

Rating:
 Voltage Rating:600V AC/DC
 Operating Temperature Range:-45~+105°C


Electrical:
 Contact resistance:5m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:5000V AC/Minute

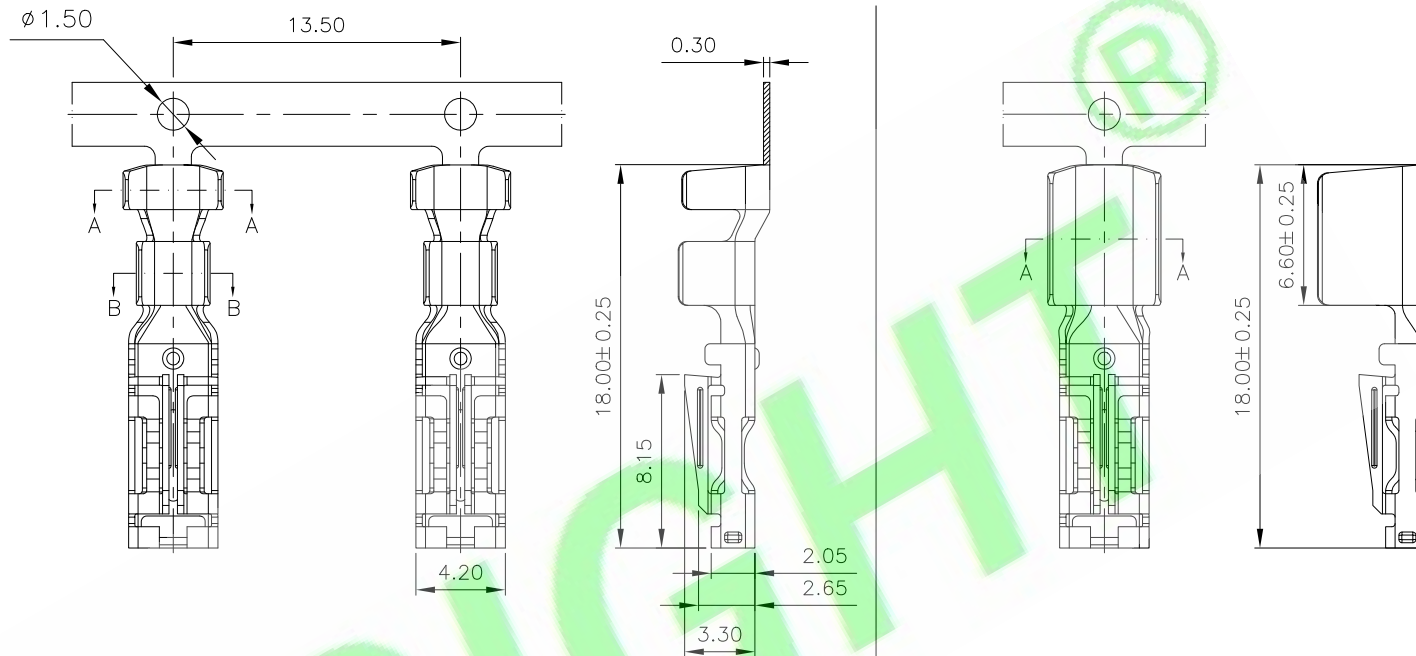


Ordering Information
 H7501TF-XX-XX

1 2 3 4 5

- 1: Series No.
- 2: TF:Female Terminal
- 3: B:Brass
 G:High conductivity copper
- 4: A:Gold Flash
 Q:Plated Tin
- 5: 01:10~12AWG
 02:14~16AWG
 03:22~24AWG

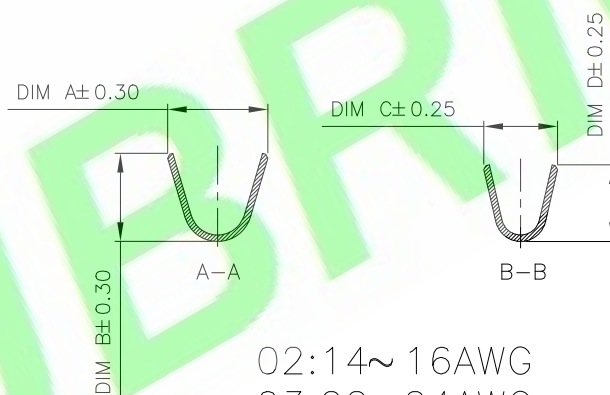

02:14~16AWG
 03:22~24AWG

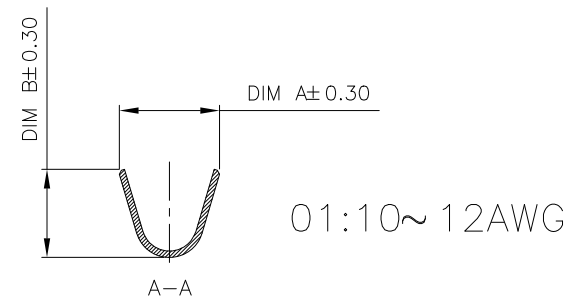

Ordering Information

Part NO	Wire range	DIM A	DIM B	DIM C	DIM D	MAT	Current Rating
01	#10~#12	5.30	5.25	/	/	Cu-ETP	32A
02	#14~#16	4.70	4.10	3.50	3.60	Brass	18A
03	#22~#24	3.40	2.00	2.80	2.20	Brass	10A

DR.BY.: XIAO	GENERAL TOLERANCE:		PART NO : H7501TF-XX-XX	
CHKD.: Judyyan	LINEAR	ANGLES	DWG. NO.:	
APPD.: Billy	x.: ±0.30	x': ±5.0°	TITLE : 7.50mm Pitch Crimp Style Female Teriminal	
	x.x: ±0.40	x.x': ±3.0°	DATE: 17-Dec-2025	
	x.xx: ±0.25	x.xxx: ±2.0°		
	x.xxx: ±0.15	x.xxx': ±1.0°		

HJBRIGHT® 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	XIAO	
	DESCRIPTION	DR.BY	ECN. NO.