

Specifications:

Material And Finish:

Housing:Hi-Temp;UL 94V-0.

Latch:Hi-Temp;UL 94V-0

Contact:Phosphor Bronze

Shell:Brass

Contact:Gold Plating Over Nickel On Contact

Rating:

Current Rating:1.5A AC/DC

Voltage Rating:40V AC/DC

Operating Temperature Range:-20°~+80°C

Electrical:

Contact resistance:30 Milliohms MAX

Insulator resistance:1000M ohm Min

Withstanding Voltage:500V DC/Minute

Ordering Information

HDMI050F-20A-01-G
1 2 3 4 5







1:—Series No.

2:—F:Female

3:—No. of Positions

4:—A:Gold Flash

5:—G:W/O Cap In Tape&Reel

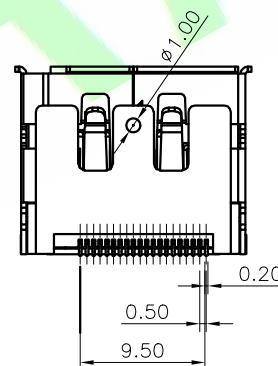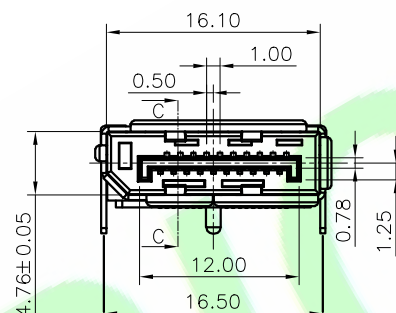

DR.BY.: JoinZm	GENERAL TOLERANCE:		PART NO : HDMI050F-20A-01-G
	LINEAR	ANGLES	
CHKD.: Judyyan	x.: ±0.38	x': ±2.0°	DWG. NO.:
APPD.: Billy	x.x: ±0.35	x.x': ±1.0°	TITLE : DisPlayPort 20-Pin Female Socket For SMT
	x.xx: ±0.25	x.xx': ±0.5°	
	x.xxx: ±0.15	x.xxx':	DATE: 30-Dec-2020

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	JoinZm	
REV.	DESCRIPTION	DR.BY	ECN. NO