

Specifications:

Material And Finish:

Housing:Hi-Temp;UL 94V-0.

Latch:Hi-Temp;UL 94V-0

Contact:Phosphor Bronze

Shell:Brass

Contact:Gold Plating Over Nickel On Contact

Rating:

Current Rating:1.5A AC/DC

Voltage Rating:40V AC/DC

Operating Temperature Range:-20°~+80°C

Electrical:

Contact resistance:30 Milliohms MAX

Insulator resistance:1000M ohm Min

Withstanding Voltage:500V DC/Minute

Ordering Information

HDMI050F-20X-01-G

1 2 3 4 5

1:— Series No.







2:— F:Female

3:— No. of Positions

4:— A:Gold Flash

H:Gold flash on contact;
Matte Tin on tail

5:— G:W/O Cap In Tape&Reel

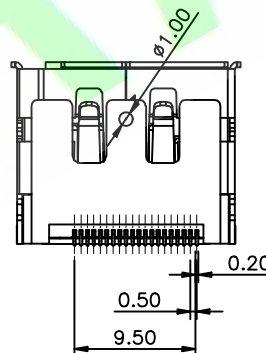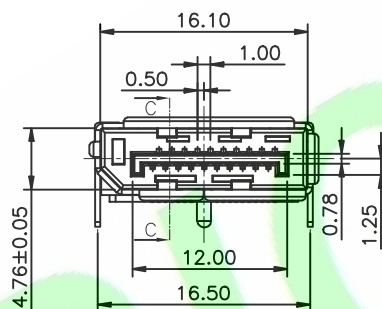

DR.BY.: JoinZm	GENERAL TOLERANCE:		PART NO : HDMI050F-20X-01-G	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Judyyan	X.: ±0.38	X': ±2.0°	TITLE :	
	X.X: ±0.35	X.X': ±1.0°	DisPlayPort 20-Pin Female Socket For SMT	
APPD.: Billy	X.XX: ±0.25	X.XX': ±0.5°	DATE: 30-Dec-2020	
	X.XXX: ±0.15	X.XXX':		

HJBRIGHT® 東莞市華晶電子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		A4
SCALE: 1:1		
UNIT: mm	THIRD ANGLE PROJECTION	

1X	ORIGINAL	JoinZm	
REV.	DESCRIPTION	DR.BY	ECN. NO.