

Specifications:

Material And Finish:

Housing:LCP UL94V-0 Color:Black

Signal Pin:Copper alloy

Power Supply Pin:Copper alloy

Shell:Zinc alloy

Cover:PA resin

Rating:

Current Rating:1.5A/Pin

Voltage Rating:100V AC/DC

Electrical:

Characteristic Impedance:100 Ohm

Insertion Loss:0.1dB to 1GHz max.

Return Loss:-20dB to 1GHz max

-17dB to 2GHz max

Ordering Information

HSD200S-04H-01-A

1 2 3 4 5


1: — Series No.

2: — S: Straight Type

3: — No. of Positions

4: — H: Gold Flash on Contact; Matte Tin on tail

5: — A: In Bag

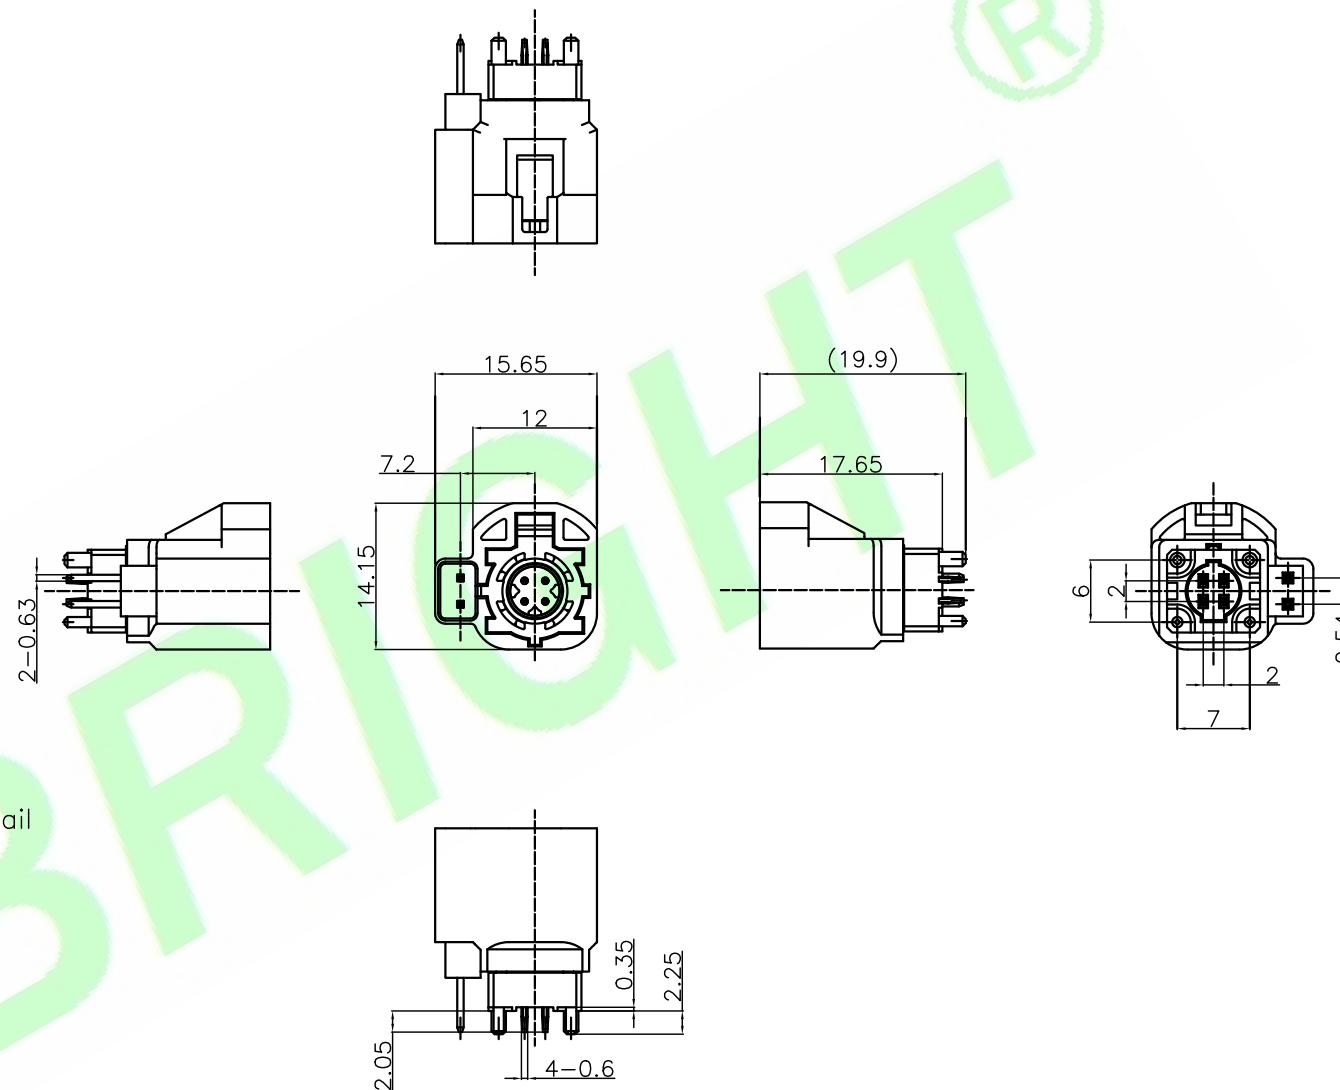

DR.BY.: Zolin	GENERAL TOLERANCE:		PART NO : HSD200S-04H-01-A	
	LINEAR	ANGLES	BURY P/N:	
CHKD.: Aren	x.: ±0.30	x'x': ±3.0°	TITLE :	
	x.xx: ±0.20	x.xx': ±2.0°	High Speed Data CONNECTOR Straight Type	
APPD.: Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 10-Oct-2023	

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Zolin	
REV	DESCRIPTION	DR.BY	ECN. NO