

Specifications:

Material And Finish:



Insulator:Nylon 66

Rating:

Voltage Rating:250V/300V/600V AC

The choice of voltage depends
on the spacing and material

Operating Temperature Range:-40°~ +105°C

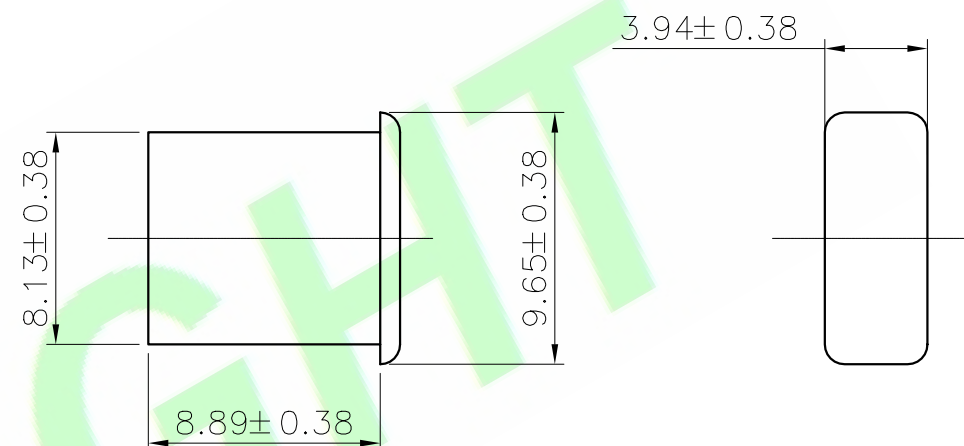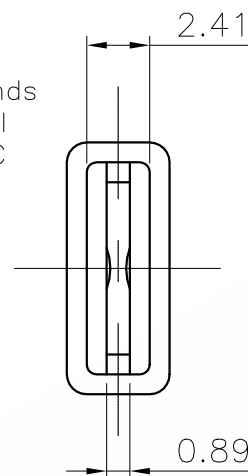

Ordering Information

HT250080-XX-A
1 2 3


1:— Series No.

2:— 01:Nylon 66 UL94V-0 Natural

02:Nylon 66 UL94V-2 Black

03:Nylon 66 UL94V-2 Natural


3:— A:In Bag



1X	ORIGINAL	JoinZm	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: JoinZm CHKD.: Judyyan APPD.: Billy	GENERAL TOLERANCE:	
	LINEAR	ANGLES
	x.: ±0.30	x': ±5.0°
	x.x: ±0.20	x.x': ±3.0°
	x.xx: ±0.15	x.xx': ±2.0°
	x.xxx: ±0.10	x.xxx': ±1.0°

PART NO : HT250080-XX-A
DWG. NO.:
TITLE : 2.50mm Tab Terminal Housing
DATE: 29-Sep-2024

HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
SCALE: 1:1		
UNIT: mm		