



Specifications:
 Material And Finish:
 Insulator:PBT UL94V-0
 Contact:Brass
 Plated:Nickel Plated

Rating:
 Operating Voltage:250V DC
 Operating Temperature Range:-40~+105°C
 Insulator resistance:1000MΩ Min
 Withstanding Voltage:1500V AC/Minute
 Protection level: IP67(Mated)
 Mating cycle:50times Min

Ordering Information

HV14101S-02N-01-X
 1 2 3 4 5

- 1: Series No.
- 2: S: Straight Type
- 3: No. of Positions
- 4: N: Nickel Plated
- 5: A: In Bag
C: In Tray

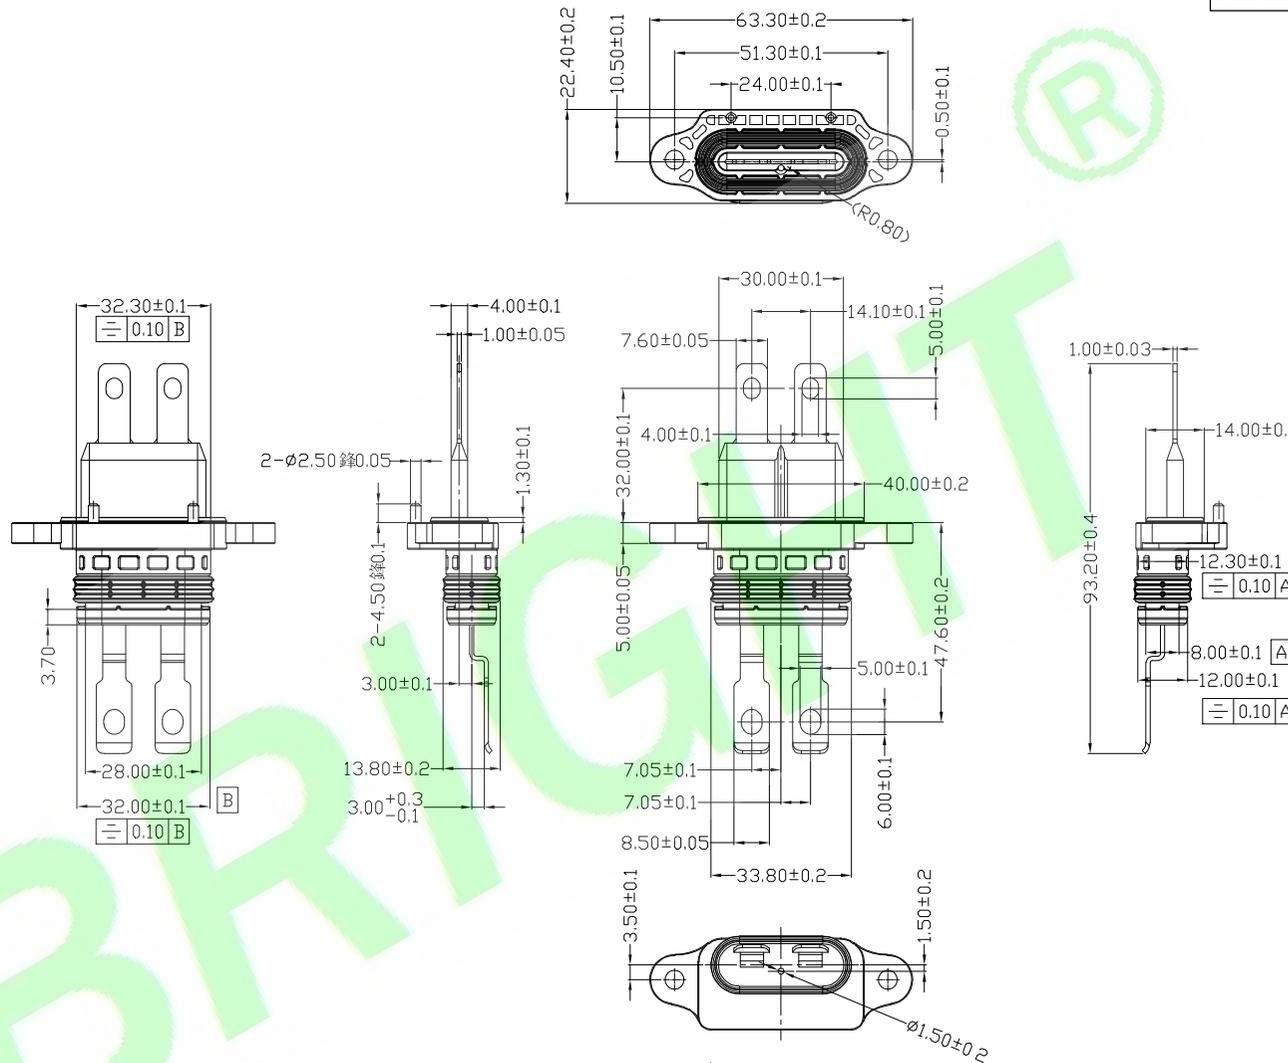

4	CONTROL HOUSE SEALING	1	SILASTIC ZY-7550C1,Green
3	PTC sealing	1	EPDM,Green
2	Metal busbar	2	Brass, Nickel plated
1	Plastic body	1	PBT+30%GF, OrangeRAL2003
ITEM	PART NAME	QTY	DESCRIPTION

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : HV14101S-02N-01-X
CHKD.: Mark	LINEAR	ANGLES	DWG. NO.:
APPD.: Billy	x.: ±1.00	x': ±5.0°	TITLE : 2Pin High voltage receptacle
	x.xx: ±0.50	x.xx': ±2.0°	DATE: 3-Mar-2025
	x.xxx: ±0.25	x.xxx': ±1.0°	

HJBRIGHT 东莞市华晶电子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.