



Specifications:

Rating:
Current Rating:3 Amp.
Operating Temperature Range:-55~+125℃.

Electrical:
Contact resistance:10mhm Max.
Insulator resistance:5000M ohm min.
Withstanding Voltage:800V.

Vibration:10Hz~2000Hz 196m/s².
Random vibration:
Power spectral density: 0.4 G²/Hz.
Total acceleration RMS value: 23.1 G.
Impact:735m/s² 11ms.
Mechanical life:500 times.

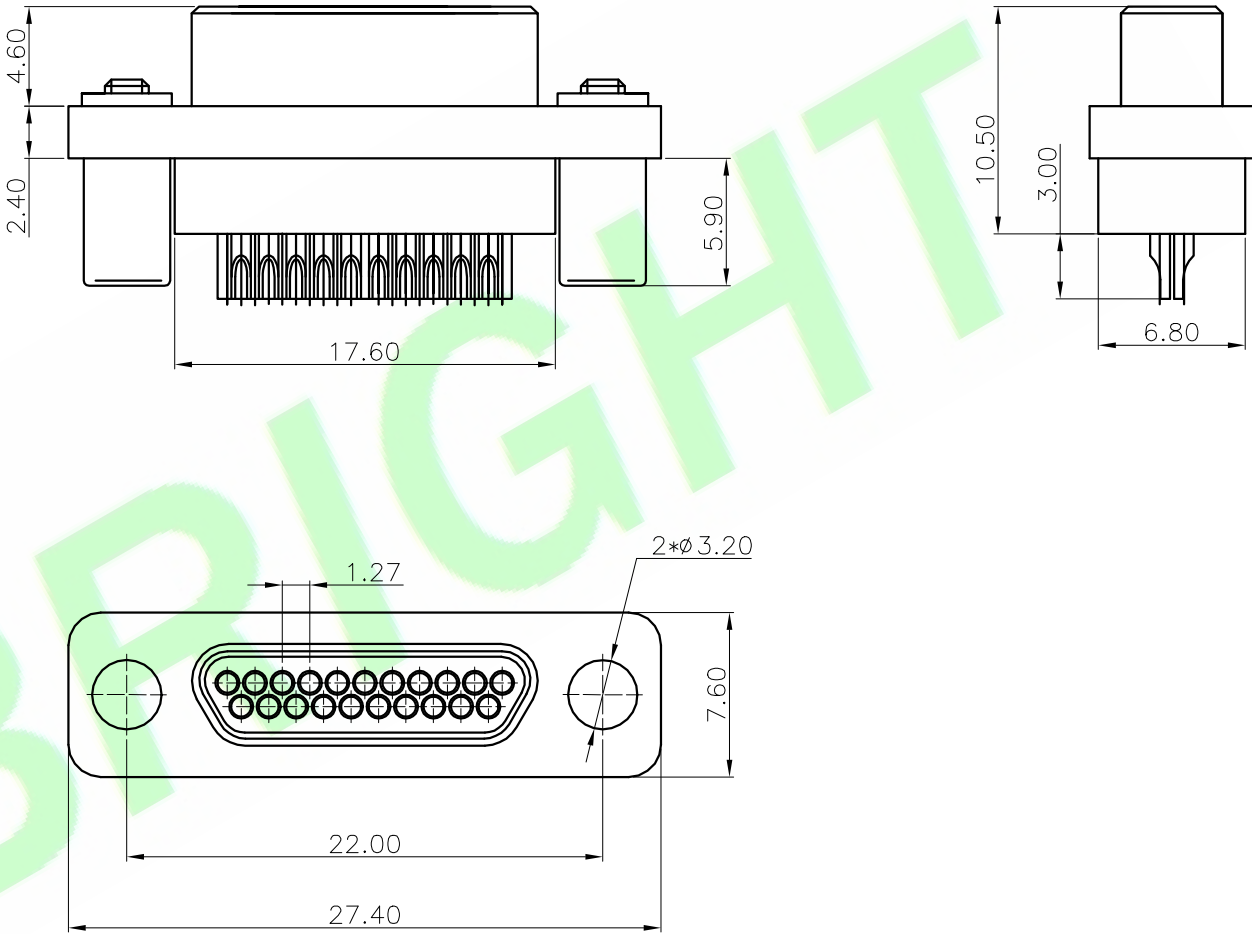

DR.BY.: JoinZm	GENERAL TOLERANCE:		PART NO : J30J-21TJSL	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
	LINEAR	ANGLES					
CHKD.: Juddyan	x.: ±0.30	x°: ±5.0°	TITLE : 1.27mm Pitch L-shaped locking component	SHEET: 1/1		A4	
APPD.: Billy	x.x: ±0.20	x.x°: ±3.0°		SCALE: 1:1			
	x.xx: ±0.15	x.xx°: ±2.0°		DATE: 27-Dec-2024			UNIT: mm
	x.xxx: ±0.10	x.xxx°: ±1.0°					
	ECN. NO						