

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Contact:Copper alloy

Rating:

Current Rating:9.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+150°C

Electrical:

Contact resistance:5m Ohm Max

Insulator resistance:100M ohm min.

Ordering Information

M1270-02X-XX-BA

1 2 3 4 5 6

1: — Series No.

2: — No. of Positions

3: — Q: Tin Plated

S: Matte Tin Plated

H: Gold flash on contact;

Matte Tin on tail

4: — 01:A Type Red

02:B Type Green

03:C Type Blue


04:D Type Black

5: — B: 180 Degree

6: — A: In Bag


with opening cable guide mounted
(state at time of supply)

contact marking

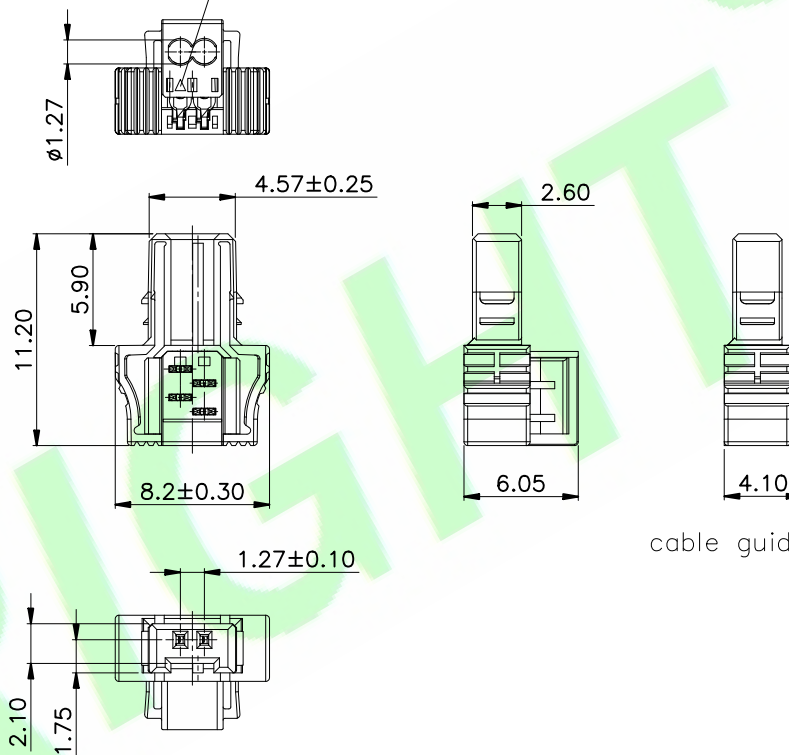


cable guide pressed on


A Type Red




B Type Green



C Type Blue



D Type Black



5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : M1270-02X-XX-BA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Aren	x.: x.x: ±0.30	x*: ±5.0° x.x*: ±3.0°	TITLE : MicroBridge Female cable Outlet 180 IDC Type 0.35MM2	SHEET: 1/1		A4
2X	Correction of operating temperature	Judyyan	20240305		x.xx: ±0.20	x.xx*: ±2.0°		SCALE: 1:1		
1X	ORIGINAL	Judyyan		APPD.: Billy	x.xxx: ±0.10	x.xxx*: ±1.0°	DATE: 12-Nov-2021	UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.						THIRD ANGLE PROJECTION	