

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Contact:Copper alloy

Rating:

Current Rating:9.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+150°C




Electrical:

Contact resistance:5m Ohm Max

Insulator resistance:100M ohm min.

with opening cable guide mounted
(state at time of supply)

contact marking




cable guide pressed on

Ordering Information


M1270-04X-XX-BA

1 2 3 4 5 6


- 1:— Series No.
 2:— No. of Positions
 3:— Q: Tin Plated
 S: Matte Tin Plated
 H: Gold flash on contact;
 Matte Tin on tail
 4:— 01: A Type Red
 02: B Type Green
 03: C Type Blue
 04: D Type Black
 5:— B: 180 Degree
 6:— A: In Bag

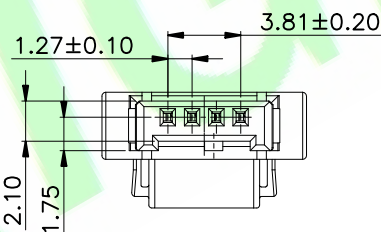


A Type Red




B Type Green



C Type Blue



D Type Black



5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : M1270-04X-XX-BA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED							
4X					LINEAR	ANGLES	DWG. NO.:								
3X				CHKD.: Aren	x.: x.x: ±0.30 x.xx: ±0.20 x.xxx: ±0.10	x': ±5.0° x.x': ±3.0° x.xx': ±2.0° x.xxx': ±1.0°	TITLE : MicroBridge Female cable Outlet 180 IDC Type 0.35MM2	SHEET: 1/1			A4				
2X	Correction of operating temperature	Judyyan	20240305					SCALE: 1:1							
1X	ORIGINAL	Judyyan		APPD.: Billy				UNIT: mm							
REV.	DESCRIPTION	DR.BY	ECN. NO.				DATE: 12-Nov-2021			THIRD ANGLE PROJECTION					
1		2		3		4		5		6		7		8	