

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Contact:Copper alloy

Rating:

Current Rating:9.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+150°C

Electrical:

Contact resistance:5m Ohm Max

Insulator resistance:100M ohm min.

Ordering Information

M1270-05X-XX-AA

1 2 3 4 5 6

1: — Series No.

2: — No. of Positions

3: — Q: Tin Plated

S: Matte Tin Plated

H: Gold flash on contact;

Matte Tin on tail

4: — 01: A Type Red

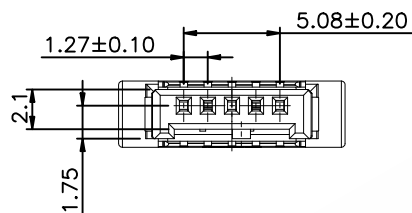
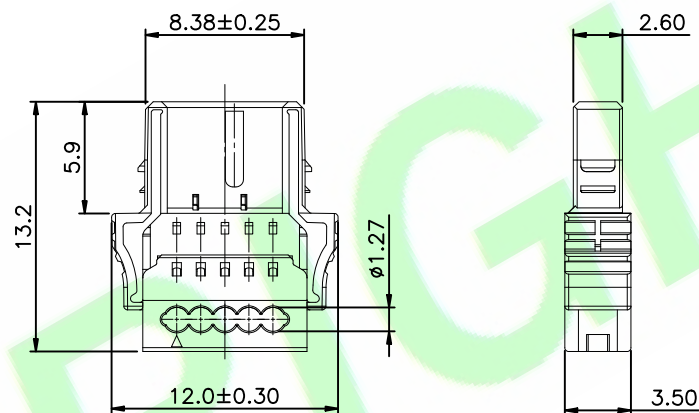
02: B Type Green

03: C Type Blue


04: D Type Black

5: — A: 90 Degree





6: — A: In Bag

with opening cable guide mounted
(state at time of supply)

cable guide pressed on



contact marking

A Type Red	B Type Green	C Type Blue	D Type Black
			

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : M1270-05X-XX-AA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm  THIRD ANGLE PROJECTION A4		
4X						LINEAR				
3X				CHKD.: Aren	x.: x.x: ±0.30	x': ±5.0° x.x': ±3.0°	TITLE : MicroBridge Female cable Outlet 90 IDC Type 0.35MM2			
2X	Correction of operating temperature	Judyyan	20240305	APPD.: Billy	x.xx: ±0.20	x.xx': ±2.0°				
1X	ORIGINAL	Judyyan			x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 12-Nov-2021			
REV.	DESCRIPTION	DR.BY	ECN. NO.							