

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Contact:Copper alloy

Rating:

Current Rating:9.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+150°C

Electrical:

Contact resistance:5m Ohm Max

Insulator resistance:100M ohm min.

Ordering Information

M1270-06X-XX-BA

1 2 3 4 5 6

1: — Series No.

2: — No. of Positions

3: — Q: Tin Plated

S: Matte Tin Plated

H: Gold flash on contact;

Matte Tin on tail

4: — 01:A Type Red

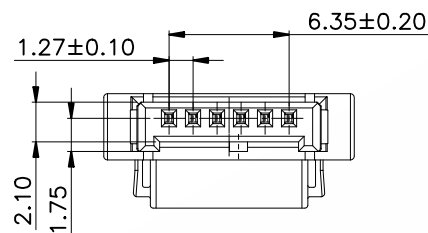



02:B Type Green

03:C Type Blue

04:D Type Black

5: — B: 180 Degree

6: — A: In Bag

with opening cable guide mounted
(state at time of supply)
contact marking

cable guide pressed on


A Type Red	B Type Green	C Type Blue	D Type Black

5X			
4X			
3X			
2X	Correction of operating temperature	Judyyan	20240305
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Judyyan
CHKD.:	Aren
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.10	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : M1270-06X-XX-BA
DWG. NO.:
TITLE : MicroBridge Female cable Outlet 180 IDC Type 0.35MM2
DATE: 12-Nov-2021

HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		A4
SCALE: 1:1		
UNIT: mm		
THIRD ANGLE PROJECTION		