

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Contact:Copper alloy

Rating:

Current Rating:9.0 Amp



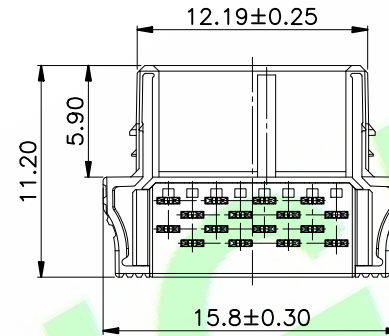
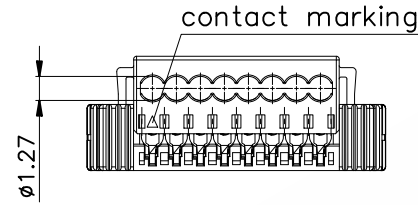
Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+150°C

Electrical:

Contact resistance:5m Ohm Max

Insulator resistance:100M ohm min.

with opening cable guide mounted
(state at time of supply)

cable guide pressed on

Ordering Information

M1270-08X-XX-BA

1 2 3 4 5 6

- 1: — Series No.
2: — No. of Positions
3: — Q: Tin Plated
S: Matte Tin Plated
H: Gold flash on contact;
Matte Tin on tail
4: — 01: A Type Red
02: B Type Green
03: C Type Blue
04: D Type Black
5: — B: 180 Degree
6: — A: In Bag

A Type Red	B Type Green	C Type Blue	D Type Black

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : M1270-08X-XX-BA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES			
3X				CHKD.: Aren	x.: x.x: ±0.30	x': ±5.0° x.x': ±3.0°	TITLE : MicroBridge Female cable Outlet 180 IDC Type 0.35MM2	SHEET: 1/1		A4
2X	Correction of operating temperature	Judyyan	20240305	APPD.: Billy	x.xx: ±0.20	x.xx': ±2.0°		SCALE: 1:1		
1X	ORIGINAL	Judyyan			x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 12-Nov-2021	UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.						THIRD ANGLE PROJECTION	