

Specifications:
Material And Finish:
Insulator:PA46 UL94V-0
Contact:Copper alloy


Rating:
Current Rating:9.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+150°C

Electrical:
Contact resistance:5m Ohm Max
Insulator resistance:100M ohm min.



Ordering Information

M1270-12X-XX-AA
1 2 3 4 5 6


- 1: — Series No.
2: — No. of Positions
3: — Q: Tin Plated
S: Matte Tin Plated
H: Gold flash on contact;
Matte Tin on tail
4: — 01: A Type Red
02: B Type Green
03: C Type Blue
04: D Type Black
5: — A: 90 Degree
6: — A: In Bag

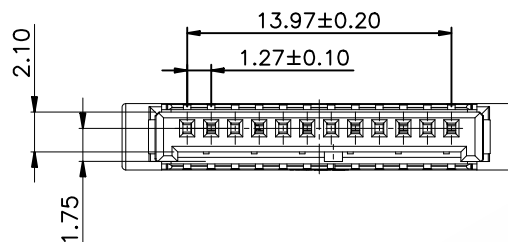


with opening cable guide mounted
(state at time of supply)

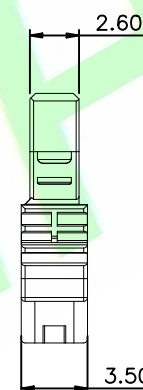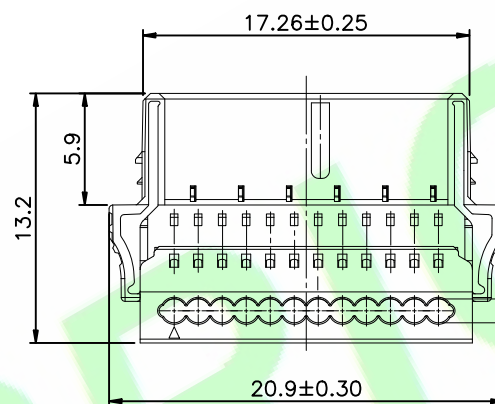


cable guide pressed on

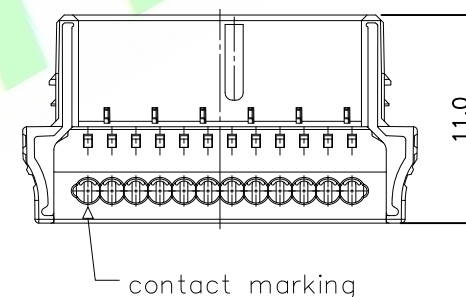


A Type Red

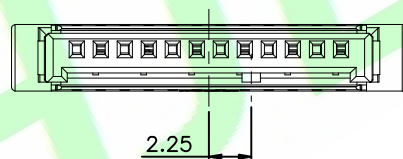


B Type Green

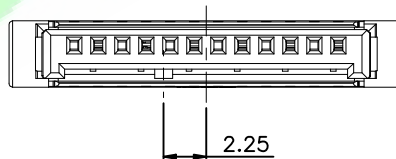

C Type Blue

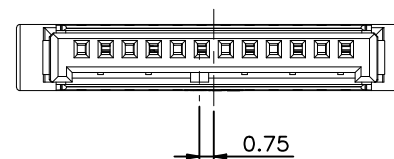

D Type Black

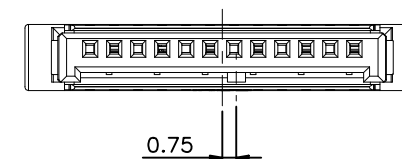

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : M1270-12X-XX-AA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				CHKD.: Aren	LINEAR	ANGLES	DWG. NO.:		
3X				APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE : MicroBridge Female cable Outlet 90 IDC Type 0.35MM2	SHEET: 1/1	THIRD ANGLE PROJECTION
2X	Correction of operating temperature	Judyyan	20240305		X.X: ±0.20	X.X': ±3.0°	DATE: 12-Nov-2021	SCALE: 1:1	
1X	ORIGINAL	Judyyan			X.XX: ±0.10	X.XX': ±2.0°		UNIT: mm	A4
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°			