
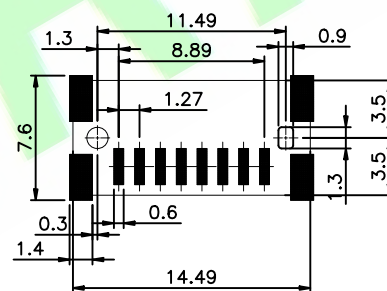
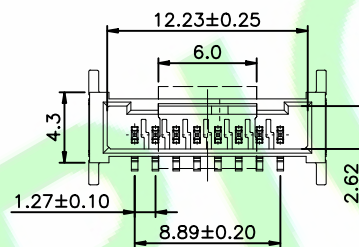

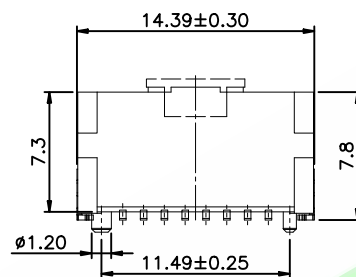


RoHS Compliant

Specifications:
Material And Finish:
Insulator:LCP UL94V-0
Contact:Copper alloy
Plated:See Ordering Information


Rating:
Current Rating:Per contact(2 Pin)9.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:LCP:-40°~+150°C

Electrical:
Contact resistance:5m Ohm Max
Insulator resistance:100M ohm min.

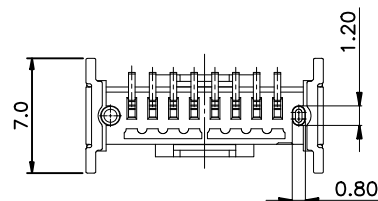


PCB Layout


A Type Red




B Type Green



C Type Blue



D Type Black



Ordering Information
M1270M-08X-XX-F
1 2 3 4 5 6

- 1: — Series No.
2: — M:SMT Type
3: — No. of Positions
4: — S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tail
5: — 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
6: — F:W/Cap In Tape&Reel

5X			
4X			
3X			
2X	Correction of operating temperature	Judyyan	20240306
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.


DR.BY.: Judyyan
CHKD.: Aren
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.10	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : M1270M-08X-XX-F
DWG. NO.:
TITLE : M1.27 MicroBridge SMT Type
DATE: 5-Sep-2021

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4