

Specifications:

Material And Finish:

Insulator:High Temperature Plastic UL94V-0

Contact:Copper alloy

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:48V AC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:25m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

M1271-XXX-01-AX
1 2 3 4 5

1:—Series No.

2:—No. of Positions




3:—L:15u" Gold on contact;
Matte Tin on tail

4:—A:90° Type

5:—A:In Bag

B:In Tube

C:In Tray

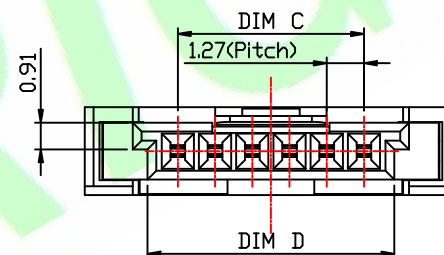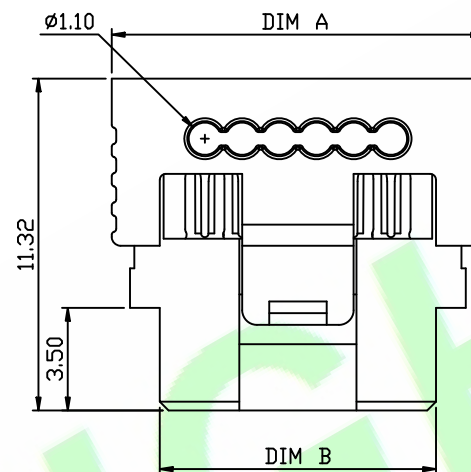

POSITIONS	DIM A	DIM B	DIM C	DIM D
02	7.62	4.23	1.27	3.35
03	8.89	5.50	2.54	4.62
04	10.16	6.77	3.81	5.89
06	12.70	9.31	6.35	8.43
08	15.24	11.85	8.89	10.97
10	17.78	14.39	11.43	13.51


5X				DR.BY.: Hu.CH	GENERAL TOLERANCE:		PART NO : M1271-XXX-01-AX
4X				CHKD.: Hu.CH	LINEAR	ANGLES	DWG. NO.:
3X				APPD.: Billy	x.: ±0.40	x': ±5.0°	TITLE :
2X					x.x: ±0.25	x.x': ±3.0°	Pitch 1.27 Single Row R/A Mini Bridge Wire Connector
1X	ORIGINAL	Hu.CH			x.xx: ±0.15	x.xxx: ±2.0°	DATE: 04-Mar-2024
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.15	x.xxx: ±1.0°	

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4