

RoHS Compliant

Specifications:

Material And Finish:

Insulator:High Temperature Plastic UL94V-0 Color:Black

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:48V AC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:25m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

M1271M-XXX-01-F
1 2 3 4 5








1:—Series No.

2:—M:SMT Type

3:—No. of Positions

4:—L:15u" Gold on contact;
Matte Tin on tail

5:—F:W/Cap In Tape&Reel

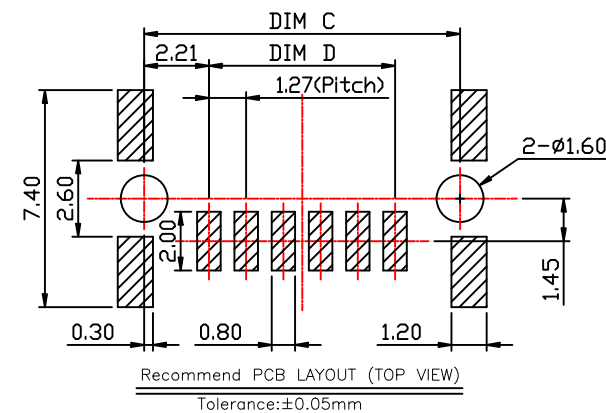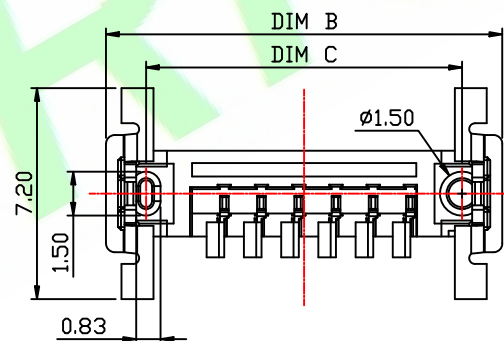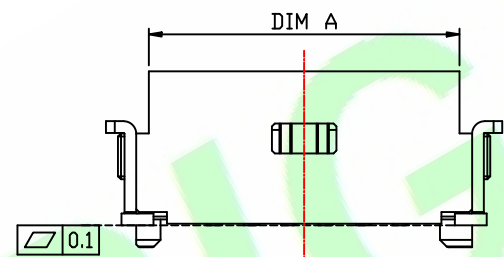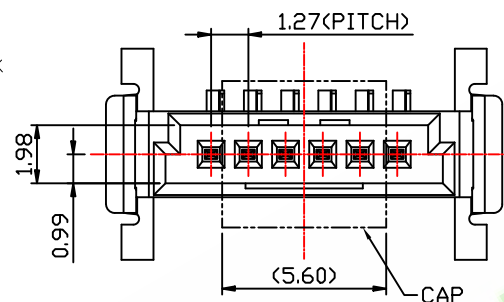

5X			
4X			
3X			
2X			
1X	ORIGINAL	Hu.CH	
REV	DESCRIPTION	DR.BY	ECN. NO.


DR.BY.: Hu.CH
CHKD.: Hu.CH
APPD.: Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
x.: ±0.40	x': ±5.0°
x.x: ±0.25	x.x': ±3.0°
x.xx: ±0.15	x.xx': ±2.0°
x.xxx: ±0.15	x.xxx': ±1.0°

PART NO : M1271H-XXX-01-G
DWG. NO.:
TITLE : Pitch 1.27 Single Row Mini Bridge Connector
DATE: 04-Mar-2024

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4