

Specifications:**Material And Finish:**

Insulator:LCP UL94V-0 Color:Natural

Contact:Copper alloy

Plated:See Ordering Information

Rating:

Current Rating:2P/22AWG 8.0 Amp

Operating Voltage:300V

Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:5m Ohm Max

Insulator resistance:1000M ohm min

Withstanding Voltage:1000V AC/Minute

Ordering Information**M2000R-XXX-01-B**

1 2 3 4 5





1:— Series No.

2:— R:R/A Type

3:— No. of Positions

4:— S:Matte Tin on tail
H:Gold flash on contact;
Matte Tin on tail

5:— B:In Tube

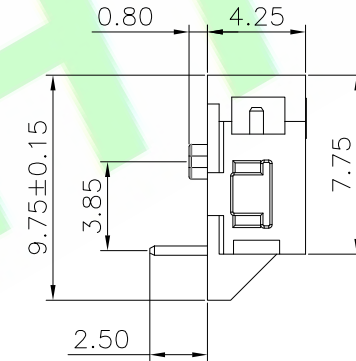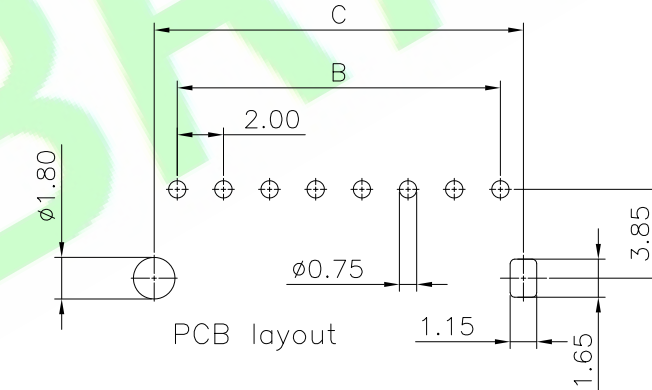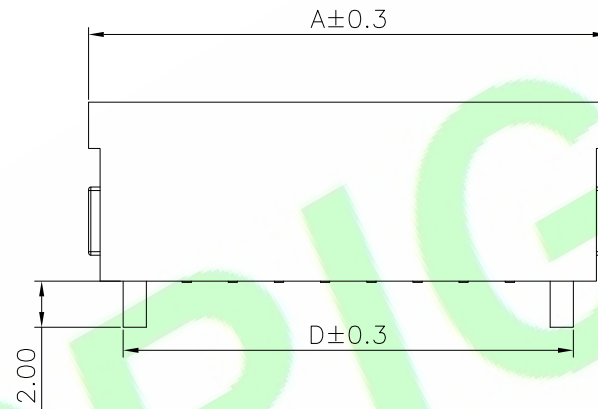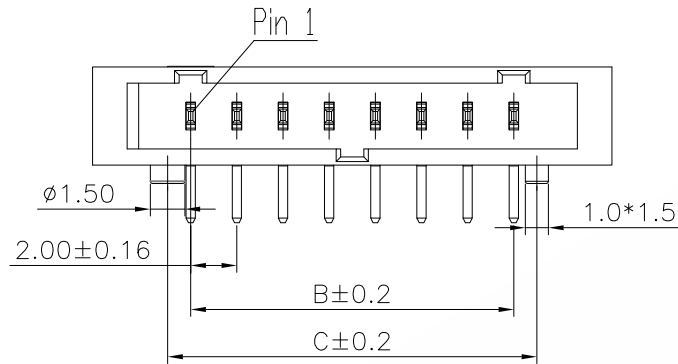

No.	Dimensions(mm)			
	A	B	C	D
2	10.5	2.0	4.0	7.5
3	12.5	4.0	6.0	9.5
4	14.5	6.0	8.0	11.5
5	16.5	8.0	10.0	13.5
6	18.5	10.0	12.0	15.5
8	22.5	14.0	16.0	19.5
10	26.5	18.0	20.0	23.5
12	30.5	22.0	24.0	27.5

5X			
4X			
3X			
2X			
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Judyyan
CHKD.:	Aren
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±	x': ±6.0°
X.X: ±0.30	x.x': ±3.0°
X.XX: ±0.20	x.xx': ±2.0°
X.XXX: ±0.10	x.xxx': ±2.0°

PART NO : M2000R-XXX-01-B
DWG. NO.:
TITLE : iBridge male 2mm pitch Single Row R/A DIP
DATE: 04-Jun-2021


HJBRIGHT® 東莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4