

Specifications:

Material: Copper alloy

Wire Range: AWG#22~24

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Electrical:

Contact resistance: 5m Ohm Max

Insulator resistance: 1000M ohm min

Withstanding Voltage: 1000V AC/Minute

Ordering Information


M2000T-PX

1 2 3

1: — Series No.


2: — T: Terminal

3: — Q: Tin Plated

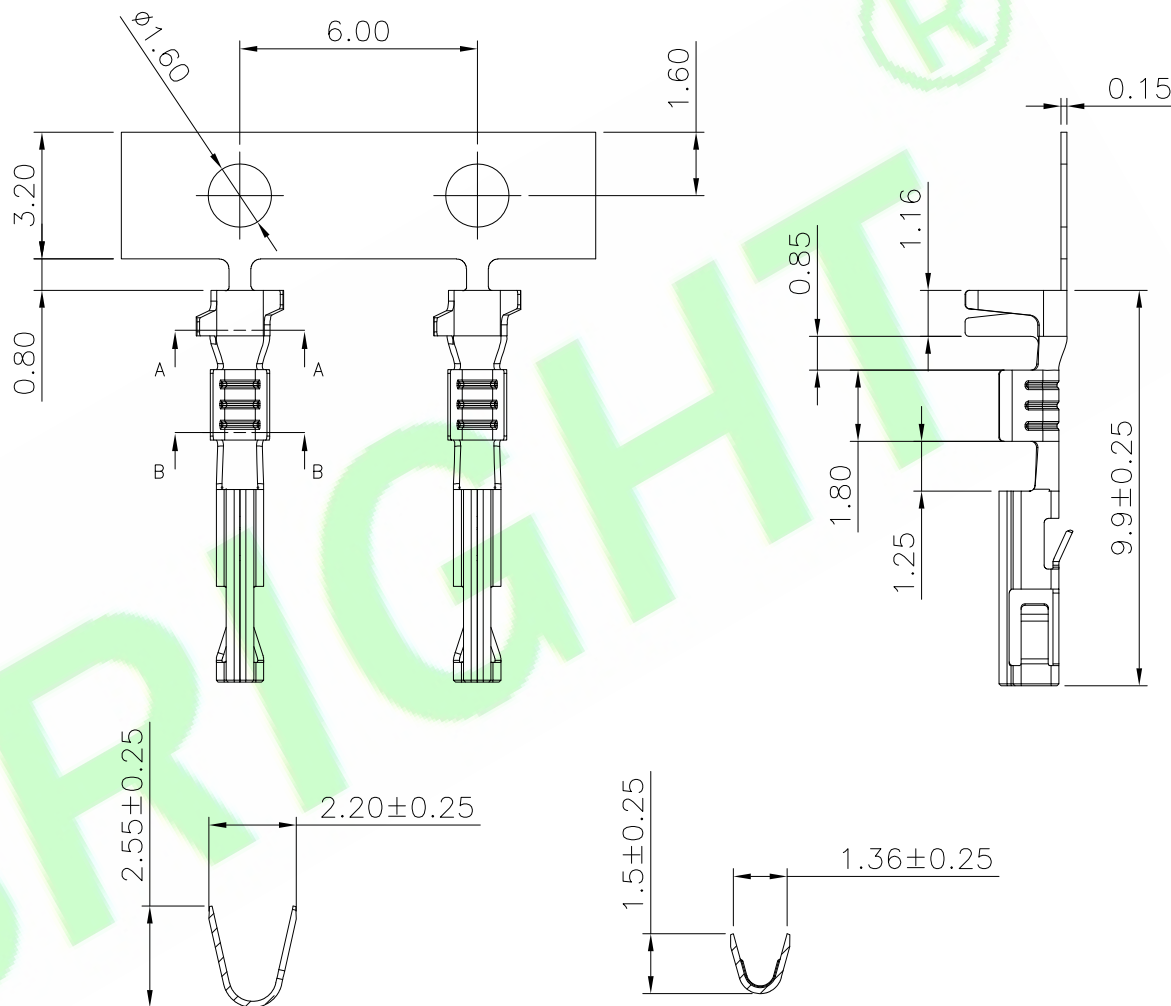

SECTION A-A

SECTION B-B

5X				DR.BY.: Tsw	GENERAL TOLERANCE:		PART NO : M2000T-PX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X					LINEAR	ANGLES	DWG. NO.:		
3X				CHKD.: Mike	X.: $\pm$	X': $\pm 6.0^{\circ}$	TITLE :	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X	Update the description	Judyyan	20220712	APPD.: Billy	X.X: ± 0.25	X.X': $\pm 3.0^{\circ}$	iBridge Ultra female contact	SCALE: 1:1	
1X	ORIGINAL	Tsw			X.XX: ± 0.15	X.XX': $\pm 2.0^{\circ}$	DATE: 04-Jun-2021	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ± 0.10	X.XXX': $\pm 2.0^{\circ}$			A4