

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Rating:

Current Rating:12.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-55°~+150°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:4000V AC/Minute

Ordering Information

M2540-02P-XX-A-01

1 2 3 4

1:— Series No.

2:— No. of Positions

3:— 01:A Type White

02:B Type Red

03:C Type Green




04:D Type Blue

05:E Type Black


4:— A:In Tube

cover loose mounted


cover pressed on

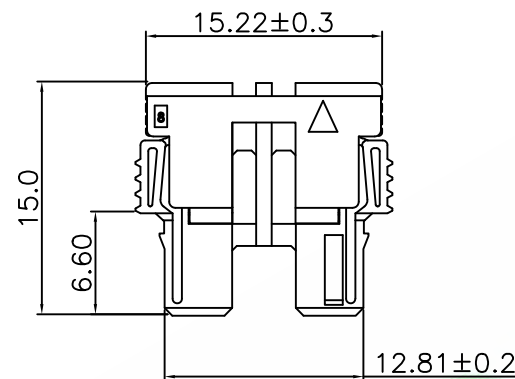


A type White




B type Red




C type Green



D type Blue



E type Black



DR.BY.:

Judyyan

GENERAL TOLERANCE:

LINEAR

ANGLES

PART NO : M2540-02P-XX-A-01

DWG. NO.:

TITLE : M2.54 SRC-A Housing 2P
Creepage distance>9.6mm

DATE: 30-Mar-2023

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

3X	Update Withstanding Voltage	Judyyan	20250530
2X	Update operating temperature	Judyyan	20240228
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO