

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Rating:

Current Rating:12.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-55°~+150°C

Electrical:



Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

cover loose mounted

cover pressed on

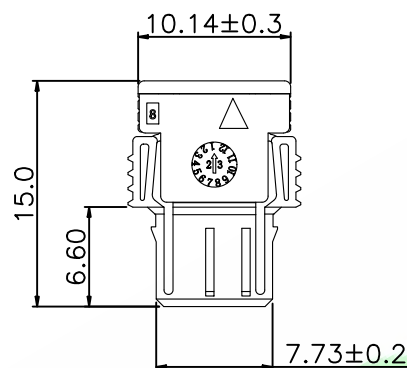

Ordering Information

M2540-02P-XX-A

1 2 3 4

- 1: — Series No.
 2: — No. of Positions
 3: — 01:A Type White
 02:B Type Red
 03:C Type Green
 04:D Type Blue
 05:E Type Black
 4: — A:In Bag

A type White	B type Red	C type Green	D type Blue	E type Black

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:	PART NO : M2540-02P-XX-A	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X				CHKD.: Tony	LINEAR X.: X.X: ±0.30 X.XX: ±0.20 X.XXX: ±0.10	DWG. NO.: TITLE : M2.54 SRC-A Housing 2P		
3X				APPD.: Billy	ANGLES X°: ±5.0° X.X°: ±3.0° X.XX°: ±2.0° X.XXX°: ±1.0°	DATE: 5-Sep-2021	SHEET: 1/1 SCALE: 1:1 UNIT: mm	
2X	Update operating temperature	Judyyan	20240228					
1X	ORIGINAL	Judyyan						
REV.	DESCRIPTION	DR.BY	ECN. NO.					