

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Rating:

Current Rating:12.0 Amp

Voltage Rating:250V AC/DC


Operating Temperature Range:-55°~+150°C

Electrical:

Contact resistance:20m Ohm Max


Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

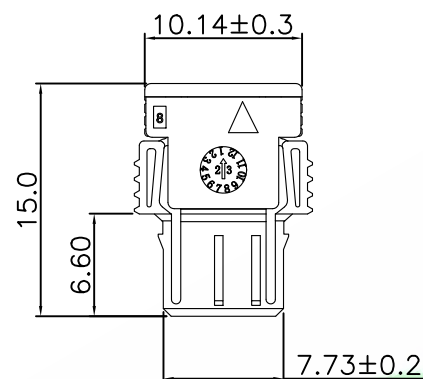

cover loose mounted

cover pressed on

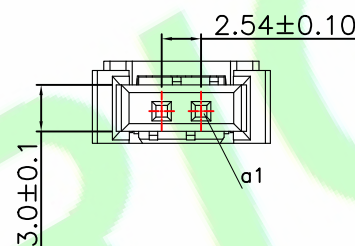

Ordering Information

M2540-02P-XX-A

1 2 3 4

1: — Series No.

2: — No. of Positions

3: — 01:A Type White

02:B Type Red

03:C Type Green

04:D Type Blue

05:E Type Black

4: — A:In Tube

A type White	B type Red	C type Green	D type Blue	E type Black

DR.BY.:
Judyyan

GENERAL TOLERANCE:

LINEAR

ANGLES

PART NO : M2540-02P-XX-A

DWG. NO.:

TITLE :

M2.54 SRC-A Housing 2P

DATE: 5-Sep-2021

HJBRIGHT® 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

2X	Update operating temperature	Judyyan	20240228
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO