

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Rating:

Current Rating:12.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-55°~+150°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

M2540-04P-XX-A



1 2 3 4

1:— Series No.

2:— No. of Positions


3:— 01:A Type White
 02:B Type Red
 03:C Type Green
 04:D Type Blue
 05:E Type Black

4:— A:In Tube

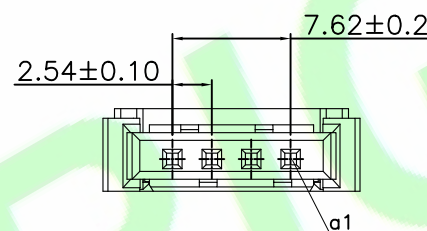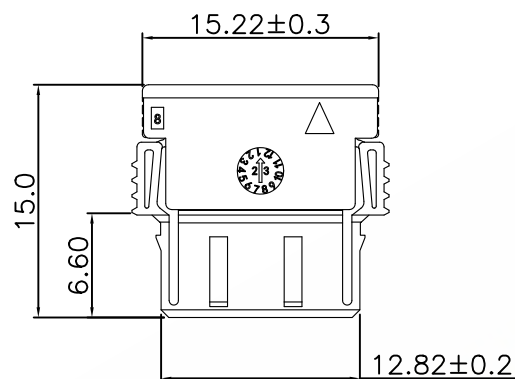

cover loose mounted

cover pressed on



A type White	B type Red	C type Green	D type Blue	E type Black

2X	Update operating temperature	Judyyan	20240228
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan	GENERAL TOLERANCE:	
CHKD.: Tony	LINEAR	ANGLES
APPD.: Billy	x.: ±0.30	x': ±5.0°
	x.x: ±0.20	x.x': ±3.0°
	x.xx: ±0.10	x.xx': ±2.0°
	x.xxx: ±0.10	x.xxx': ±1.0°

PART NO : M2540-04P-XX-A
DWG. NO.:
TITLE : M2.54 SRC-A Housing 4P
DATE: 5-Sep-2021

HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
SHEET: 1/1	
SCALE: 1:1	
UNIT: mm	