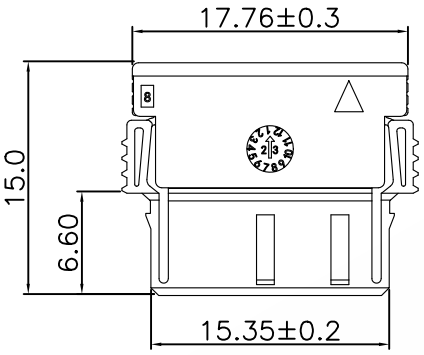
RoHS Compliant


Specifications:
Material And Finish:
Insulator:PA46 UL94V-0

Rating:
Current Rating:12.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-55°~+150°C


Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute

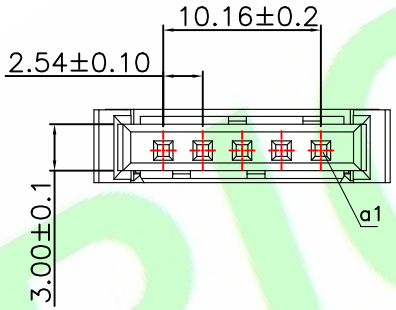


cover loose mounted





cover pressed on








Ordering Information
M2540-05P-XX-A
1 2 3 4

1: —— Series No.
2: —— No. of Positions
3: —— 01:A Type White
02:B Type Red
03:C Type Green
04:D Type Blue
05:E Type Black
4: —— A:In Tube

A type White	B type Red
	

C type Green	D type Blue	E type Black
		

REV.	DESCRIPTION	DR.BY	ECN. NO.
2X	Update operating temperature	Judyyan	20240228
1X	ORIGINAL	Judyyan	

DR.BY.: Judyyan
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:

LINEAR		ANGLES	
X.:		X°:	±5.0°
X.X:	±0.30	X.X°:	±3.0°
X.XX:	±0.20	X.XX°:	±2.0°
X.XXX:	±0.10	X.XXX°:	±1.0°

PART NO : M2540-05P-XX-A
DWG. NO.:
TITLE : M2.54 SRC-A Housing 5P
DATE: 5-Sep-2021

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm
THIRD ANGLE PROJECTION

A4

HJBRIGHT®