

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Rating:

Current Rating:12.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-55°~+150°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

M2540-06P-XX-A

1 2 3 4

1:— Series No.

2:— No. of Positions

3:— 01:A Type White

02:B Type Red

03:C Type Green




04:D Type Blue

05:E Type Black

4:— A:In Tube



cover loose mounted

cover pressed on

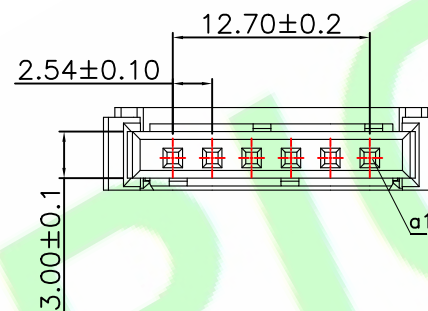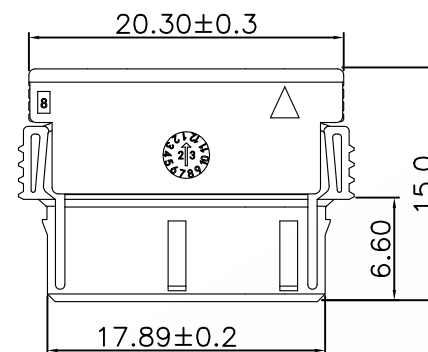

A type White




B type Red

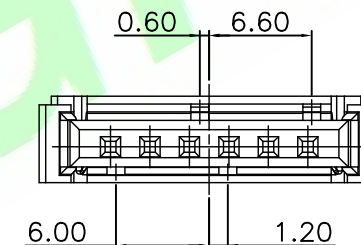

C type Green

D type Blue

E type Black

DR.BY.:
Judyyan

GENERAL TOLERANCE:

LINEAR

ANGLES

PART NO.: M2540-06P-XX-A

DWG. NO.:

TITLE:

M2.54 SRC-A Housing 6P

DATE: 5-Sep-2021

HJBRIGHT® 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

2X	Update operating temperature	Judyyan	20240228
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

CHKD.: Tony	x.: x.x: ±0.30 x.xx: ±0.20 x.xxx: ±0.10	x': ±5.0° x.x': ±3.0° x.xx': ±2.0° x.xxx': ±1.0°
APPD.: Billy		