

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Rating:

Current Rating:12.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-55°~+150°C

Electrical:


Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

cover loose mounted

cover pressed on

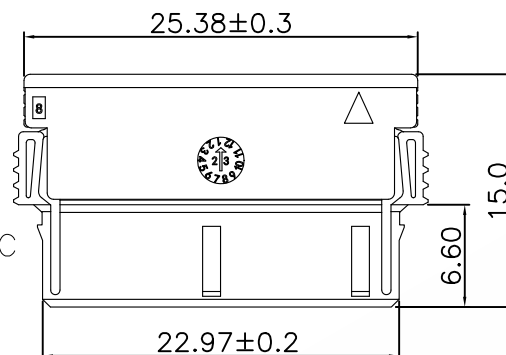

Ordering Information

M2540-08P-XX-A


1 2 3 4

1:—Series No.

2:—No. of Positions



3:—01:A Type White
 02:B Type Red
 03:C Type Green
 04:D Type Blue
 05:E Type Black

4:—A:In Tube

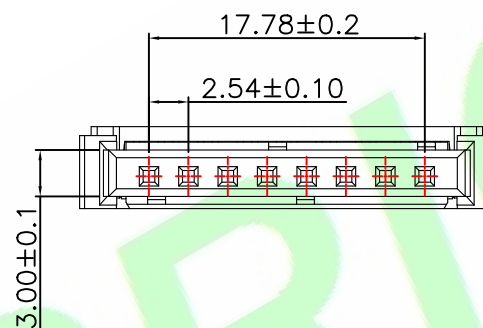

A type White




B type Red

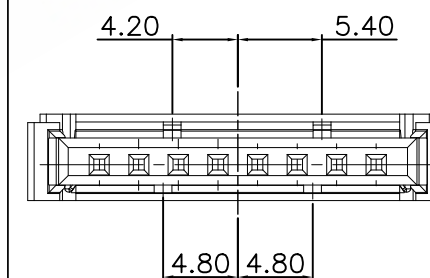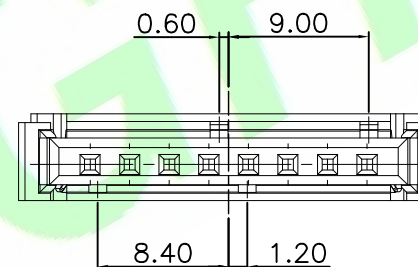

C type Green

D type Blue

E type Black

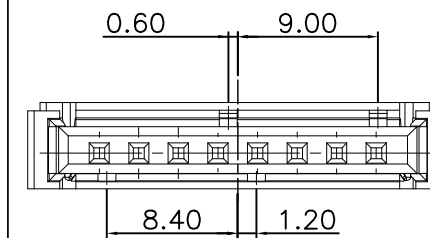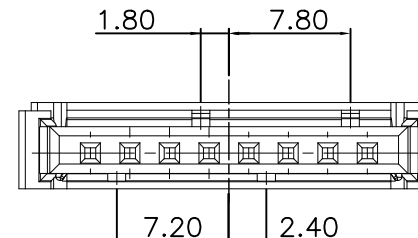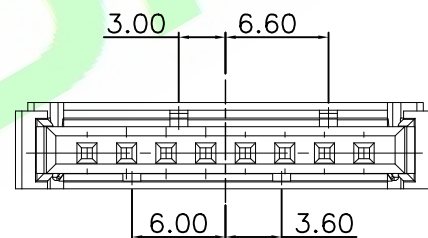

DR.BY.:

Judyyan

GENERAL TOLERANCE:

LINEAR

ANGLES

PART NO : M2540-08P-XX-A

DWG. NO.:

TITLE :

M2.54 SRC-A Housing 8P

DATE: 5-Sep-2021

HJBRIGHT® 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

2X	Update operating temperature	Judyyan	20240228
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO