

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Rating:

Current Rating:12.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-55°~+150°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

M25400-08P-05-A

1 2 3 4

1: — Series No.

2: — No. of Positions




3: — 02:B Type Red

03:C Type Green

04:D Type Blue

05:E Type Black

4: — A:In Bag

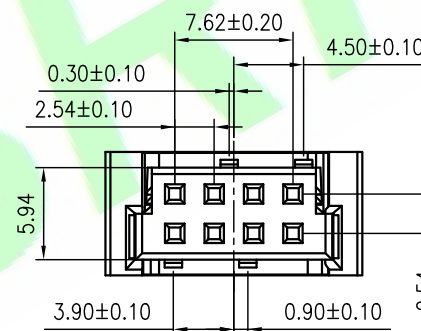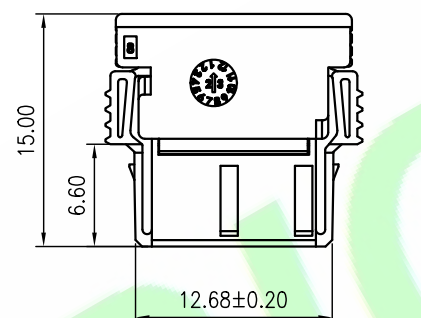

covers loose mounted

9.08(REF)



covers pressed on

7.95(REF)



HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:	PART NO : M25400-08P-05-A
4X					LINEAR	DWG. NO.:
3X				CHKD.: Aren	X.: ±0.30	TITLE :
2X	Correction of operating temperature	Judyyan	20240229	APPD.: Billy	X.X: ±0.20	M2.54 SRC-B Housing 08P
1X	ORIGINAL	Judyyan			X.XX: ±0.10	DATE: 5-Sep-2021
REV.	DESCRIPTION	DR.BY	ECN. NO		X.XXX: ±0.10	