

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Rating:

Current Rating:5.0 Amp

Voltage Rating:25V AC/DC

Operating Temperature Range:-55~+150°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

M25400-08P-05A-A

1 2 3 4

1:— Series No.

2:— No. of Positions




3:— 02:B Type Red

03:C Type Green

04:D Type Blue


05:E Type Black

4:— A:In Bag

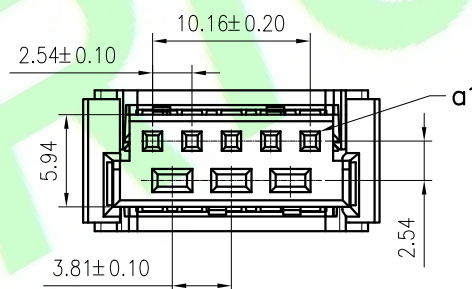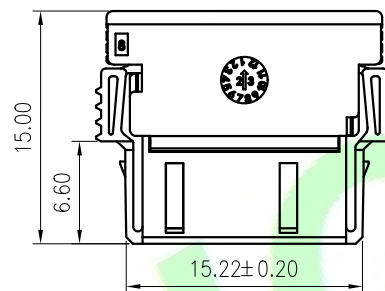


covers loose mounted

9.08(REF)



covers pressed on

7.95(REF)

DR.BY:
Hu.CH

GENERAL TOLERANCE:

LINEAR

ANGLES

PART NO : M25400-08P-05A-A

DWG. NO.:

TITLE :

M2.54 SRC-B Housing 08P


DATE: 18-Feb-2025

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Hu.CH	
REV.	DESCRIPTION	DR.BY	ECN. NO