



Specifications:  
 Material And Finish:  
 Insulator:PA46 UL94V-0

Rating:  
 Current Rating:  
 Power Pin: 15.0 Amp  
 Signal Pin: 6.0 Amp  
 Voltage Rating:25V AC/DC  
 Operating Temperature Range:-55~+150°C


Electrical:  
 Contact resistance:20m Ohm Max  
 Insulator resistance:1000M ohm min.  
 Withstanding Voltage:1000V AC/Minute

Ordering Information  
 M25400-08P-05A-X




- 1: — Series No.
- 2: — No. of Positions
- 3: — 02:B Type Red  
 03:C Type Green  
 04:D Type Blue  
 05:E Type Black
- 4: — A:In Bag  
 B:In Tube

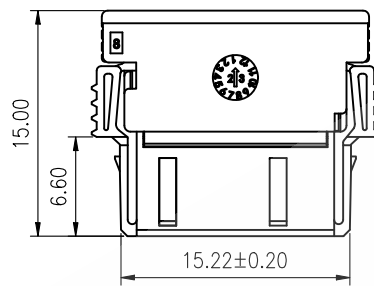

covers loose mounted



covers pressed on

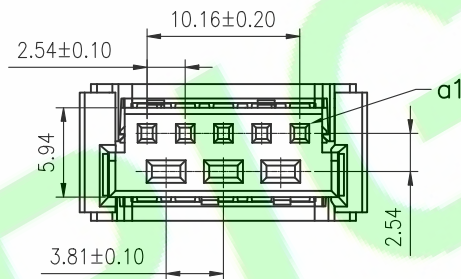


B type Red	C type Green	D type Blue	E type Black

DR.BY.: Hu.CH	GENERAL TOLERANCE:		PART NO : M25400-08P-XXA-X
CHKD.: Sam	LINEAR	ANGLES	DWG. NO.:
APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE : M2.54 SRC-B Housing 08P
	X.X: ±0.20	X.X': ±3.0°	DATE: 18-Feb-2025
	X.XXX: ±0.10	X.XXX': ±1.0°	

**HJBRIGHT** 東莞市華晶電子有限公司  
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1  
 SCALE: 1:1  
 UNIT: mm



**A4**

2X	Add Fool-proofing	Hu.CH	20250421
1X	ORIGINAL	Hu.CH	
REV.	DESCRIPTION	DR.BY	ECN. NO.