

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Rating:

Current Rating:12.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-55°~+85°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

M25400-12P-XX-A

1 2 3 4

1: — Series No.

2: — No. of Positions

3: — 01:A Type White




02:B Type Red

03:C Type Green

04:D Type Blue

05:E Type Black

4: — A:In Bag

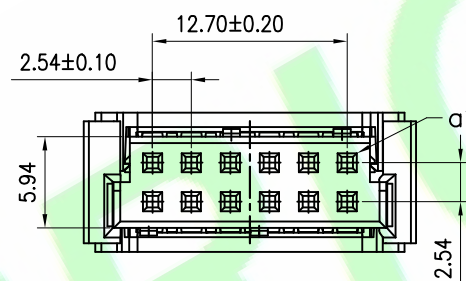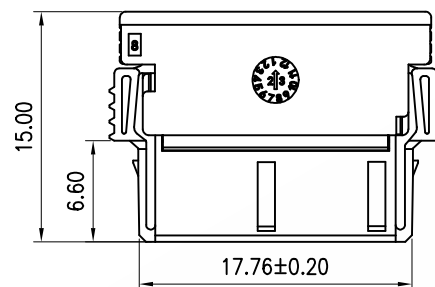

covers loose mounted

9.08(REF)




covers pressed on


7.95(REF)




A Type White

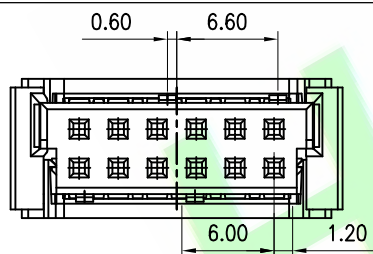


B Type Red




C Type Green



D Type Blue



E Type Black



5X				DR.BY.:	
4X				Zolin	
3X				CHKD.:	
2X	Update view orientation	Judyyan	20250118	Aren	
1X	ORIGINAL	Zolin		APPD.:	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	

GENERAL TOLERANCE:

LINEAR

X.: ±0.30

X.X: ±0.20

X.XX: ±0.10

ANGLES

X.: ±5.0°

X.X: ±3.0°

X.XX: ±2.0°

X.XXX: ±1.0°

PART NO : M25400-12P-XX-A

DWG. NO.:

TITLE :

M2.54 SRC-B Housing 12P

DATE: 5-Sep-2022

HJBRIGHT® 東莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4