

**Specifications:**

**Material And Finish:**

Insulator:PA46 UL94V-0

**Rating:**

Current Rating:12.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-55~+150°C

**Electrical:**

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

**Ordering Information**

M25400-14P-XX-A

1 2 3 4

1: — Series No.

2: — No. of Positions

3: — 01:A Type White




02:B Type Red

03:C Type Green

04:D Type Blue

05:E Type Black

4: — A:In Bag

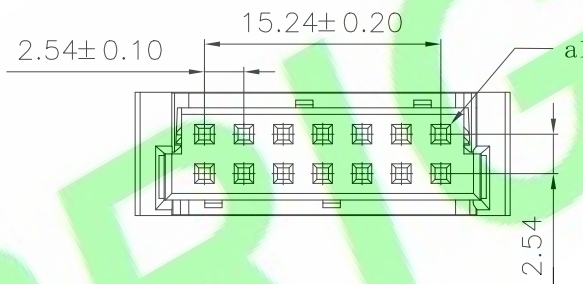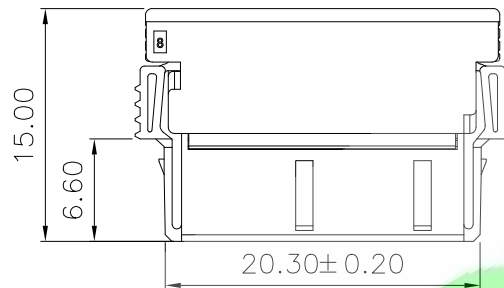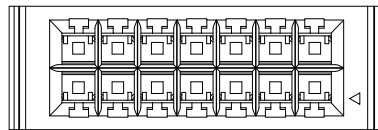

covers loose mounted

covers pressed on

9.08(REF)

7.95(REF)



A Type White	B Type Red	C Type Green	D Type Blue	E Type Black

DR.BY.:

XIAO

CHKD.:

Judyyan

APPD.:

Billy

GENERAL TOLERANCE:

LINEAR

ANGLES

x.: ±0.30

x': ±5.0°

x.x: ±0.20

x.x': ±3.0°

x.xx: ±0.10

x.xx': ±2.0°

x.xxx: ±0.10

x.xxx': ±1.0°

PART NO : M25400-14P-XX-A

DWG. NO.:

TITLE :

M2.54 SRC-B Housing 14P


DATE: 5-Sep-2022

**HJBRIGHT** 東莞市華晶電子有限公司  
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

**A4**

1X	ORIGINAL	XIAO	
REV.	DESCRIPTION	DR.BY	ECN. NO