




Specifications:
Material And Finish:
Insulator:PA46 UL94V-0

Rating:
Current Rating:12.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:LCP:-55°~+150°C



Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute

Ordering Information
M25400-20P-XX-A
1 2 3 4


- 1: — Series No.
2: — No. of Positions
3: — 02:B Type Red
03:C Type Green
04:D Type Blue
05:E Type Black
4: — A:In Bag

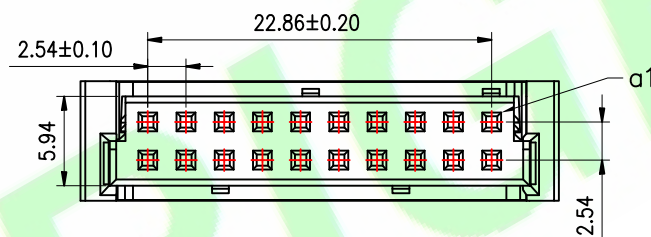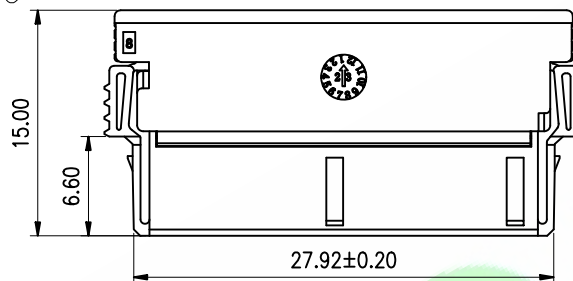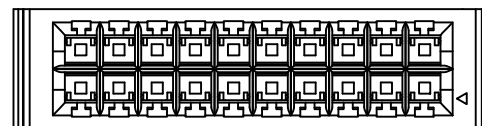


covers loose mounted covers pressed on




B Type Red

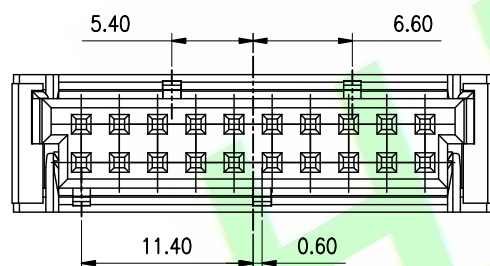


C Type Green

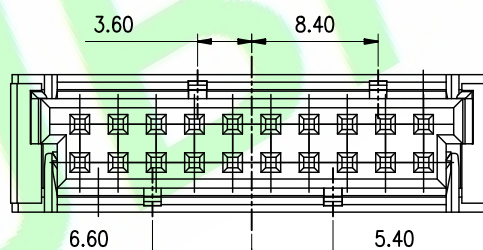

D Type Blue

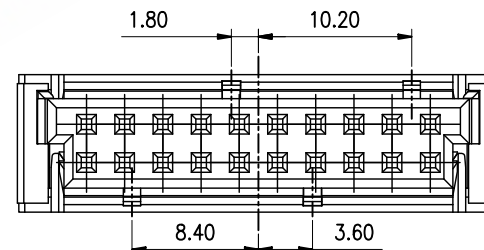

E Type Black

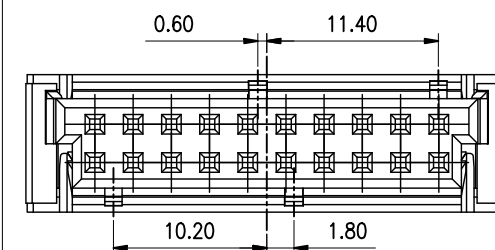

5X			
4X			
3X			
2X	Correction of operating temperature	Judyyan	20240229
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.:
Judyyan
CHKD.:
Aren
APPD.:
Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.10	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : M25400-20P-XX-A
DWG. NO.:
TITLE :
M2.54 SRC-B Housing 20P
DATE: 5-Sep-2021

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4