

RoHS Compliant





Specifications:
Material And Finish:
Insulator:LCP UL94V-0
Contact:Copper alloy
Plated:See Ordering Information

Rating:
Current Rating:12.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-55°~+150°C


Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute

Ordering Information
M25400M-20X-XX-F
1 2 3 4 5 6


- 1: — Series No.
2: — M:SMT Type
3: — No. of Positions
4: — S:Matte Tin on tail
H:Gold flash on contact;
Matte Tin on tail
5: — 02:B Type Red
03:C Type Green
04:D Type Blue
05:E Type Black
6: — F:Tape&Reel

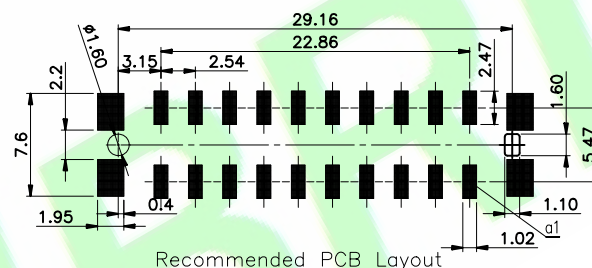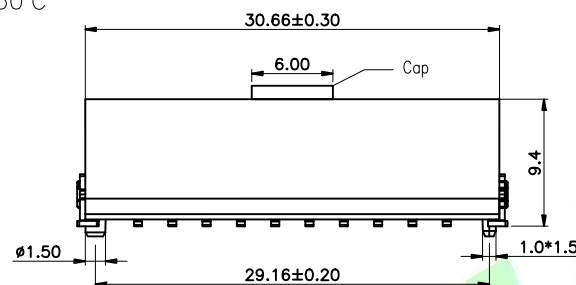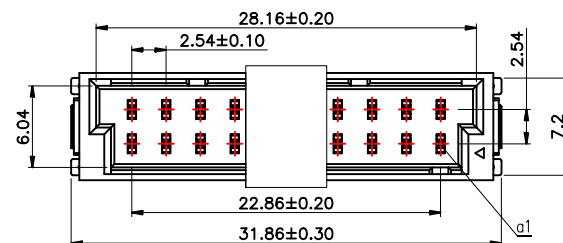


B Type Red

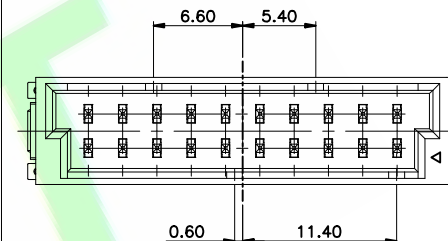


C Type Green

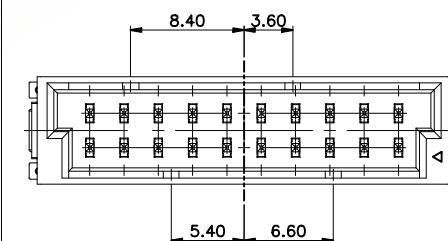

D Type Blue

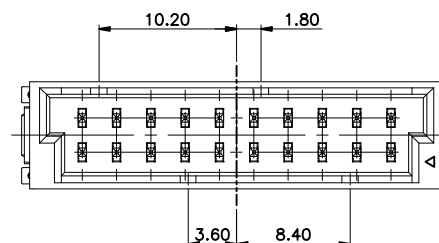

E Type Black

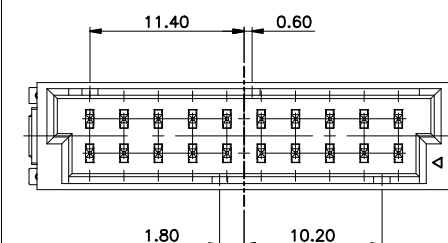

5X			
4X			
3X			
2X	Correction of operating temperature	Judyyan	20240229
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Judyyan
CHKD.:	Aren
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X.X: ±5.0°
X.X: ±0.20	X.XX: ±3.0°
X.XXX: ±0.10	X.XXX: ±2.0°
	X.XXX: ±1.0°

PART NO : M25400M-20X-XX-F
DWG. NO.:
TITLE : M2.54 SRC-A SMT Type 20P
DATE: 5-Sep-2021

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4