
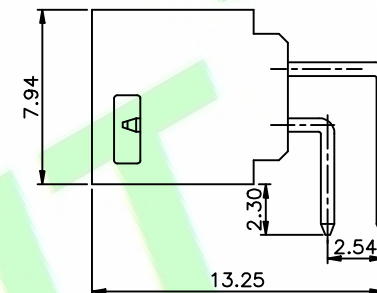


Specifications:  
Material And Finish:  
Insulator:PA46 UL94V-0  
Contact:Copper alloy  
Plated:See Ordering Information



Rating:  
Current Rating:5.0 Amp  
Voltage Rating:25V AC/DC  
Operating Temperature Range:-55°~+150°C

Electrical:  
Contact resistance:20m Ohm Max  
Insulator resistance:1000M ohm min.  
Withstanding Voltage:1000V AC/Minute

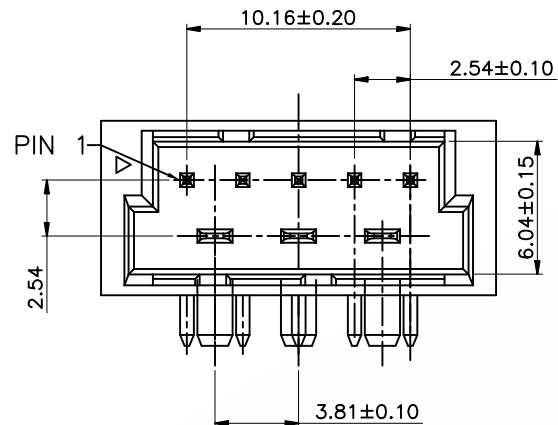

Ordering Information  
M25400R-08X-05A-B

- 1: — Series No.  
2: — R:R/A Type  
3: — No. of Positions  
4: — S:Matte Tin on tail  
H:Gold flash on contact;  
Matte Tin on tail  
5: — 02:B Type Red  
03:C Type Green  
04:D Type Blue  
05:E Type Black  
6: — B:In Tube

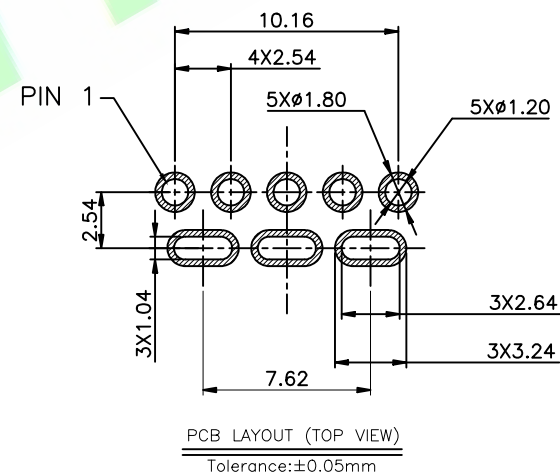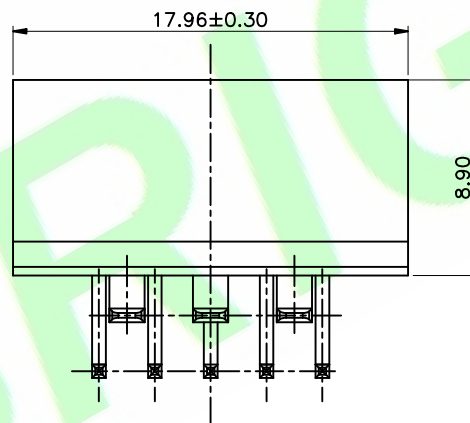


|    |             |       |          |
|----|-------------|-------|----------|
| 1X | ORIGINAL    | Hu.CH |          |
|    | DESCRIPTION | DR.BY | ECN. NO. |

|                  |                    |               |                               |
|------------------|--------------------|---------------|-------------------------------|
| DR.BY.:<br>Hu.CH | GENERAL TOLERANCE: |               | PART NO : M25400R-08X-05A-B   |
|                  | LINEAR             | ANGLES        |                               |
| CHKD.:<br>Sam    | X.: ±0.30          | X': ±5.0°     | DWG. NO.:                     |
|                  | X.X: ±0.20         | X.X': ±3.0°   |                               |
| APPD.:<br>Billy  | X.XX: ±0.10        | X.XX': ±2.0°  | TITLE :<br>M2.54 R/A Type 08P |
|                  | X.XXX: ±0.10       | X.XXX': ±1.0° |                               |
|                  |                    |               | DATE: 22-05-2025              |

**HJBRIGHT®** 东莞市華晶電子有限公司  
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1  
SCALE: 1:1  
UNIT: mm



THIRD ANGLE PROJECTION

A4